

A

Patent Application
Docket No. 27943-00252USPT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re patent application of:

Kransmo et al

For: SYSTEM AND METHOD FOR FAST COLD START OF A cps RECEIVER IN
A TELECOMMUNICATIONS ENVIRONMENT

BOX APPLICATION
Assistant Commissioner
for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL	
"EXPRESS MAIL" Mailing Label No EL146164312US	
Date of Deposit <u>DECEMBER 22, 1998</u>	
I hereby certify that this paper or fee is being deposited with the U S Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D C 20231	
Type or Print Name	Carol Marsteller
Signature	<i>Carol Marsteller</i>

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find the following:

- X Specification, claims and abstract of the above-referenced patent application (total of 65 pages)
- X 12 sheet(s) of drawing(s) (X formal/___ informal).
- X Combined Declaration and Power of Attorney (unsigned)
- ___ An Assignment of the invention to: _____
- ___ A verified statement claiming small entity status under 37 CFR 1.9 and 1.27.
- ___ Other (specify): _____

The filing fee has been calculated as shown below:

FOR: <u>LARGE ENTITY</u>	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$760
TOTAL CLAIMS	46 - 20	26	\$18	\$468
INDEPENDENT CLAIMS	4- 3	1	\$78	\$ 78
MULTIPLE DEPENDENT CLAIM(S) PRESENTED			\$260	\$ _____
TOTAL FEE:				\$1,306

____ Please charge my Deposit Account No. 10-0447 in the amount of \$_____. This sheet is attached in duplicate.

x A check in the amount of \$1,306.00 is attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.

X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 10-0447. This sheet is attached in triplicate.

X Any additional filing fees required under 37 CFR 1.16 including fees for presentation of extra claims.

X Any additional patent application processing fees under 37 CFR 1.17 and under 37 CFR 1.20(d).


X The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 10-0447. This sheet is attached in duplicate.

X Any patent application processing fees under 37 CFR 1.17 and under 37 CFR 1.20(d).

____ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

X Any filing fees under 37 CFR 1.16 including fees for presentation of extra claims.

Date: December 22, 1998


Raymond Van Dyke
Registration No. 34,746

JENKENS & GILCHRIST
1445 Ross Avenue, Suite 3200
Dallas, Texas 75202-2799
214/855-4708

U.S. Patent Application
Docket No. 27943-00252USPT

<p align="center">CERTIFICATE OF MAILING BY EXPRESS MAIL</p> <p>"EXPRESS MAIL" Mailing Label No.: <u>EL146164312US</u></p> <p>Date of Deposit: December 22, 1998</p> <p>I hereby certify that this paper or fee is being deposited with sufficient postage with the U.S. Postal Service "Express Mail Post Office to Addressee" service as suggested by 37 C.F.R. § 1.10 on the date indicated above in an envelope addressed to the Assistant Commissioner of Patents, Washington, D.C. 20231.</p> <p>Name: <u>CAROL MARSTALLER</u></p> <p><i>Carol Marstaller</i></p> <p>Signature</p>

**SYSTEM AND METHOD FOR FAST COLD START
OF A GPS RECEIVER IN A TELECOMMUNICATIONS ENVIRONMENT**

CROSS REFERENCE(S) TO RELATED APPLICATIONS

This nonprovisional U.S. Patent Application contains
5 subject matter related to copending Nonprovisional U.S.
Patent Application, Serial No. 09/063,028 entitled "System
and Method for Provisioning Assistance Global Positioning
System Information to a Mobile Station", filed on April 20,
1998, in the names of Christopher H. KINGDOM, Bagger R. ZADEH
10 and Jan Lennart KRANSO. This nonprovisional U.S. Patent
Application also contains subject matter related to copending

U.S. Patent Application
Docket No. 27943-00252USPT

Provisional U.S. Patent Application, Serial No. 60/096,436,
entitled "Method for Improving Signal Acquisition in a Global
Positioning System Receiver", filed on August 13, 1998, in
the name of Leland Scott BLOEBAUM. These earlier-filed
5 related Provisional & Nonprovisional U.S. Patent Applications
and the disclosures contained therein are hereby incorporated
by reference herein.

BACKGROUND OF THE PRESENT INVENTION

Technical Field of the Invention

10 The invention relates to the field of integrated
telecommunications systems comprising Global Positioning
System (GPS) receivers within mobile terminals, and more
specifically to a system and method for improving the cold
start time of an integrated GPS receiver.

Description of Related Art

15 The cellular telecommunications industry has made
phenomenal strides in commercial operations throughout the
world. Cellular telecommunications is one of the fastest
growing and most demanding telecommunications applications
20 ever. Today it represents a large and continually increasing

U.S. Patent Application
Docket No. 27943-00252USPT

percentage of new telephone subscriptions around the world. Growth in major metropolitan areas has so far exceeded initial expectations. If this trend continues, the effects of rapid growth will soon reach even the smallest markets.

5 This continual growth has revealed the existence of a considerable customer demand for value added services. Innovative solutions are required to meet these needs for product and service differentiation while maintaining high quality service without unduly raising prices. One such
10 value added service is locating the geographic position of a mobile terminal.

Determining the geographical position of a mobile station within a cellular network or other Public Land Mobile Network (PLMN) has recently become important for a wide range
15 of applications. For example, positioning services may be desired by transport and taxi companies to determine the location of their vehicles and to improve the efficiency of dispatch procedures. In addition, for emergency calls, e.g., 911 calls, knowing the exact location of a mobile terminal
20 may be vital in ensuring a positive outcome in emergency situations.

U.S. Patent Application
Docket No. 27943-00252USPT

Furthermore, positioning services can be used to determine the location of a stolen car, to identify home zone calls which may be charged at a lower rate, to detect hot spots in a micro cell, or to provide premium subscriber services, e.g., the *Where Am I* service. The *Where Am I* service facilitates the determination of, for example, the location of the nearest gas station, restaurant, or hospital to a mobile station.

One technique for determining the geographic position of a mobile station is to use the satellite-based Global Positioning System (GPS). GPS is a satellite navigation system that provides specially coded satellite signals that can be processed in a GPS receiver to yield the position, velocity and time of a receiving unit. Four or more GPS satellite signals are needed to compute the three-dimensional locational coordinates and the time offset of a receiver clock relative to a fixed coordinate system.

The GPS system comprises twenty-four satellites (not counting spares) that orbit the Earth in approximately twelve hours. The satellite orbits repeat virtually the same ground track once every day. The orbital altitude of the GPS satellites (20,200 Km) is such that the satellites repeat the

U.S. Patent Application
Docket No. 27943-00252USPT

same ground track and configuration over any point approximately once every twenty-four hours. There are six orbital planes each nominally with four satellites in each, that are equally spaced (i.e., 60° apart) and inclined at about 55° relative to the equatorial plane of the Earth. This constellation arrangement ensures that between five and eight satellites are visible to users from any point on Earth.

The satellites of the GPS system offer two levels of precision in determining the position, velocity and time coordinates at a GPS receiver. The bulk of the civilian users of the GPS system use the Standard Positioning Service (SPS) which has a predictable accuracy of ± 100 meters horizontally, ± 156 meters vertically and ± 340 ns time accuracy. The Precise Positioning Service (PPS) is available to only to authorized users having cryptographic equipment and keys and specially equipped receivers.

Each of the GPS satellites transmit two microwave carrier signals. The L1 frequency (centered at 1575.42 MHz) carries the navigation message as well as the SPS code signals. The L2 frequency (centered at 1227.60 MHz) is used

The L1 and L2 microwave carrier signals are modulated by three binary codes: a 1.023 MHz Coarse Acquisition (C/A) code, a 10.23 MHz Precise Code (P-Code) and a 50 Hz Navigational System Data Code (NAV Code). The C/A code is a pseudorandom number (PRN) code that uniquely characterizes a GPS satellite. All of the GPS satellites transmit their binary codes over the same L1 & L2 carriers. The multiple simultaneously-received signals are recovered by a Code Division Multiple Access (CDMA) correlator. The correlator in a civilian GPS receiver first recovers the C/A Code as modulated by the NAV Code. A Phase Locked Loop (PLL) circuit then separates out the C/A Code from the NAV Code. It should be emphasized that a GPS receiver first needs to determine its approximate location in order to determine which of the GPS satellites are within range. Conversely, a GPS receiver that knows its approximate position can tune faster into the signals transmitted by the appropriate GPS satellites.

20 The startup of a GPS receiver typically requires the
acquisition of a set of navigational parameters from the
navigational data signals of four or more GPS satellites.

U.S. Patent Application
Docket No. 27943-00252USPT

As explained elsewhere in this application, this process of initializing a GPS receiver may often take several minutes.

25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205 210 215 220 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 480 485 490 495 500 505 510 515 520 525 530 535 540 545 550 555 560 565 570 575 580 585 590 595 600 605 610 615 620 625 630 635 640 645 650 655 660 665 670 675 680 685 690 695 700 705 710 715 720 725 730 735 740 745 750 755 760 765 770 775 780 785 790 795 800 805 810 815 820 825 830 835 840 845 850 855 860 865 870 875 880 885 890 895 900 905 910 915 920 925 930 935 940 945 950 955 960 965 970 975 980 985 990 995

The duration of the GPS positioning process is directly dependent upon how much information a GPS receiver has. Most GPS receivers are programmed with almanac data, which coarsely describe the expected satellite positions for up to one year ahead. However, if the GPS receiver does not have some knowledge of its own approximate location, then the GPS receiver cannot correlate signals from the visible satellites fast enough, and therefore, cannot calculate its position quickly. Furthermore, it should be noted that higher a signal strength is needed for capturing the C/A Code and the NAV Code at start-up than is needed for continued monitoring of an already-acquired signal. It should also be noted that the process of monitoring the GPS signal is significantly affected by environmental factors. Thus, a GPS signal which may be easily acquired in the open becomes progressively harder to acquire when a receiver is under foliage, in a vehicle, or worst of all, in a building.

20 Recent governmental mandates, e.g., the response time requirements of the FCC Phase II E-911 service, make it imperative that the exact position of a mobile handset be

U.S. Patent Application
Docket No. 27943-00252USPT

362221 607250

determined in an expedited manner. Thus, in order to
implement a GPS receiver effectively within a mobile terminal
while also meeting the demands for expedited and accurate
positioning, it has become necessary to be able to quickly
5 provide mobile terminals with accurate assistance data, e.g.,
local time and position estimates, satellite ephemeris and
clock information (which may vary with the location of the
mobile station). The use of such assistance data can permit
a GPS receiver that is integrated with or connected to a
10 mobile station to expedite the completion of its start-up
procedures. It is therefore desirable to be able to send the
necessary assistance GPS information over an existing
wireless network to a GPS receiver that is integrated with
or connected to a mobile terminal.

SUMMARY OF THE INVENTION

It is therefore a primary object of the present invention to reduce the start up time of GPS receivers associated with mobile stations. It is a further object of the present invention to provide improved performance of GPS receivers integrated with a mobile terminal by transmitting data that can assist in the fast acquisition of a GPS navigational data signal over a wireless network. It is also an object of the present invention to devise a system that meets the response time requirements the FCC Phase II E-911 service. It is an additional object of the invention to permit the speedy acquisition of approximate locational information by a GPS receiver under environmental conditions where the signal strength is low.

The system and method of the present invention offers a technique for assisting the fast cold start of a Global Position System (GPS) receiver integrated with or connected to a mobile terminal. This is accomplished by having one or more reference GPS receivers located throughout the cellular network, each reference GPS receiver being capable of providing locally accurate lists of GPS satellites within

ranging distance and the associated ephemeris, clock and differential correction information relating to one or more GPS satellites.

5 The location of the Base Transceiver Station (BTS) serving the cell that the mobile terminal is currently located in is used as the initial position estimate for that mobile terminal. This initial position estimate is used to ascertain the nearest reference GPS receiver and the navigational data is then sent to the GPS-equipped mobile
10 terminal through the wireless telecommunications network to enable the built-in GPS receiver to coarsely estimate its position relatively quickly.

15 In one aspect, the present invention is a system and method for improving the cold start efficiency of a GPS receiver in a mobile terminal that is under the operational control of a Base Transceiver Station (BTS). A reference GPS receiver connected to the BTS first acquires the signals from four or more GPS satellites. In the preferred embodiment, the GPS receivers tune into the L1 frequency (centered at
20 1575.42 MHz). In an alternative embodiment, the GPS receivers tune into the high-precision) L2 frequency (1227.60 MHz).

U.S. Patent Application
Docket No. 27943-00252USPT

5 The Code Division Multiple Access (CDMA) satellite signals are demodulated at the reference GPS receiver. The 50 Hz navigational data signal is recovered from each of the demodulated GPS satellite signals. In an alternative embodiment of the present invention, the reference GPS receiver computes its actual physical location.

10 When the GPS-equipped mobile terminal first powers up or in certain other situations when the GPS signal is too attenuated to permit the initialization of the GPS receiver associated with the mobile terminal, the mobile terminal sends a request to the BTS requesting approximate navigational data. In another embodiment the mobile terminal requests the BTS to directly transmit actual locational data to the mobile terminal.

15 Upon receiving a request for approximate navigational data from the GPS-equipped mobile terminals, the BTS transmits the navigational data bit stream (or the actual physical locational information) to the invoking mobile terminals. In one embodiment of the present invention, this
20 transmission from the BTS to the GPS-equipped mobile terminal takes place as a Short Message Service Cell Broadcast. In an alternative embodiment, this transmission takes place over

the Broadcast Control Channel (BCCH) of the wireless telecommunications system. The GPS-equipped mobile terminal uses the transmitted navigational data bitstream to speedily acquire the GPS signals from the (four or more) optimally
5 situated satellites in the GPS constellation.

In an extension of the present invention, the BTS periodically monitors the exact radial location of the mobile terminals and transmits a Timing Advance parameter to the GPS-equipped mobile terminal to dynamically compensate for
10 the varying distances between the mobile terminal and the Base Transceiver Station. In such a case, the GPS-equipped mobile terminal uses this Timing Advance parameter to refine its estimate of the approximate location of the GPS-equipped mobile terminal.

15 **BRIEF DESCRIPTION OF THE DRAWINGS**

A more complete understanding of the method and system of the present invention may be obtained by reference of the detailed description of the preferred embodiments that follow, taken in conjunction with the accompanying drawings,
20 wherein:

FIGURE 1 is a block diagram of a conventional terrestrially-based wireless telecommunications system;

FIGURE 2 shows the reference configuration of the transmission chain in a GSM TDMA telecommunications system;

5 FIGURE 3 is a diagrammatic representation of the GSM TDMA timeframe structures;

FIGURE 4 shows the nominal constellation of the Global Positioning System (GPS) satellites;

10 FIGURE 5 shows the data interchange between a GPS control station, a GPS satellite and a GPS receiver;

FIGURE 6 is an exemplary illustration of the use of GPS navigational system in aerial, marine and terrestrial applications;

FIGURE 7 shows the signals generated by a GPS satellite;

15 FIGURE 8 shows the format of the navigation data signals generated by a GPS satellite;

FIGURE 9 shows a simplified GPS receiver block diagram;

20 FIGURE 10 is a block diagram illustrating the steps in determining the Universal Coordinated Time (UTC) from GPS satellite signals;

FIGURE 11 illustrates positioning of a mobile terminal within a cellular network using the Global Positioning System; and

FIGURE 12 demonstrates steps in a sample positioning of
5 a mobile terminal using GPS in accordance with preferred embodiments of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in
10 which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully
15 convey the scope of the invention to those skilled in the art.

By way of background, the European Telecommunications Standards Institute (ETSI) established a standardization group in 1982 to formulate the specifications for the Global
20 System for Mobile (GSM) Communication digital mobile cellular

radio system. The ETSI GSM Standard uses Time Division Multiple Access (TDMA) Channel Multiplexing Scheme.

FIGURE 1 illustrates a Public Land Mobile Network (PLMN), such as the exemplary GSM cellular network 110, which in turn comprises a plurality of MSC/VLR Service Areas 112, each with a Mobile Switching Center (MSC) 114 and an associated Visitor Location Register (VLR) 116. The MSC/VLR Service Areas 112, in turn, include a plurality of Location Areas (LAs) 118, which are defined as that part of a given MSC/VLR Service Area 112 in which a mobile terminal or a mobile station (MS) 120 may move freely without having to update its location to the MSC 114 and/or VLR 116 that controls the LA 118. Each Location Area 118 is further divided into a number of cells 122. The exemplary Mobile Station 120 is the physical equipment, e.g., a car phone or other portable telephone, that is used by a mobile subscriber to communicate with the cellular network 110, with other mobile subscribers, or with other parties outside the subscriber network, whether wireline or wireless.

The MSC 114 is in communication with at least one Base Station Controller (BSC) 123, which, in turn, is in contact with at least one Base Transceiver Station (BTS) 124. The

U.S. Patent Application
Docket No. 27943-00252USPT

862221 66T6T60

BTS is the physical equipment, illustrated for simplicity as a radio tower in FIGURE 1, that resources radio coverage to the cell 122 for which it is responsible. It should be understood that the various BSCs 123 may be connected to several BTS's 124, and may be implemented as stand-alone nodes or integrated with the MSC 114. In either event, the BSC 123 and BTS 124 components, as a whole, are generally referred to as a Base Station System (BSS) 125.

With further reference to FIGURE 1, each PLMN Service Area or cellular network 110 includes a Home Location Register (HLR) 126, which is a database containing subscriber information, e.g., user profiles, current location information, International Mobile Subscriber Identity (IMSI) number, and other administrative information, for subscribers who are registered within the PLMN 110. The HLR 126 may be co-located with a specific MSC 114, integrated with MSC 114, or (as illustrated in FIGURE 1) service multiple MSCs 114.

The VLR 116 is a database containing information about the plenary set of MSs 120 that are located within an MSC/VLR Service Area 112. If an MS 120 moves into a new physical location such as a new MSC/VLR Service Area 112 (not shown in FIGURE 1), the VLR 116 associated with the MSC 114

requests information about the MS 120 from the HLR 126 (while simultaneously informing the HLR 126 about the new location of the MS 120). Accordingly, when the user of the MS 120 wants to make a call, the local VLR 116 will have the requisite subscriber identification information without having to reinterrogate the HLR 126.

FIGURE 2 shows the reference configuration of the transmission chain in a GSM TDMA telecommunications system. It should be emphasized that the reference configuration shows only the transmission path of a GSM TDMA system and does not expressly define the specification of an associated receiver. As shown in FIGURE 2 the information bits 200 that are to be transmitted are first fed into the coder 205 that performs block coding. The block coding, which includes the addition of parity bits to the information bits 200, provides some error detection and correction capabilities.

The block coded information and parity bits are then fed into a convolutional coder 210, as shown in FIGURE 2. The output of the convolutional coder are reordered and partitioned at 215 before being interleaved over multiple transmission bursts at 220. The interleaved bits are then fed into an optional cryptological unit 230 to generate

encrypted bits. These encrypted bits are then fed to a burst
builder 235 before being burst multiplexed at 240 in
conformance with the GSM standard set forth by ETSI. The
output of the burst multiplexer 240 are then fed to a
5 differential encoder 245 before being modulated at 250. The
modulated bits are then fed to a transmitter 260 and thence
via an antenna 280 to the air interface 290.

In the reverse direction, the incoming signals received
by the antenna 280 over the air interface 290 are fed to a
10 receiver 270. The received information bits 299 are then
extracted by a receiver unit for functional compatibility
with the processing performed in the transmit direction as
explained above.

The basic GSM access scheme is Time Division Multiple
15 Access (TDMA) with eight basic physical channels per carrier.
The carrier separation is 200 KHz. A physical channel is
therefore defined as a sequence of TDMA frames as
additionally specified by a time slot number and a frequency
hopping sequence. The basic radio resource is a time slot
20 that lasts 15/26 ms (i.e. 576.9 μ s) and which transmits
information at a modulation rate of approximately 270.833
Kbits/s. This means that the duration of each time slot

5
10
15

A GSM TDMA hyperframe is divided into 2,048 superframes each of which has a duration of 6.12s. The superframe is the least common multiple of the GSM TDMA time frame structures. The superframe itself is further divided into three kinds of multiframes: 26-multiframes, 51-multiframes and 52-multiframes.

5

10

20

packet data traffic and control channels, e.g., Packet Broadcast Control Channel (PBCCH), Packet Common Control Channel (PCCCH), Packet Associated Control Channel (PACCH) & Packet Data Traffic Channel (PDTCH).

5 As noted earlier, a TDMA frame is made up of eight time slots and has a duration of 4.615 ms (60/13 ms). Each time slot is a time interval of approximately 576.9 μ s (15/26 ms), i.e., 156.25 bit durations, and its physical content is called a burst. As shown in FIGURE 3, four different types
10 of bursts are used in the GSM TDMA system.

The first type of burst is the so-called Normal Burst (NB), which contains 116 encrypted bits and includes a guard time of 8.25 bit durations (approximately 30.46 μ s). Normal bursts are used to carry information on traffic and control
15 channels, except for the Random Access Channel (RACH).

The second type of burst is the so-called Frequency Correction Burst (FB), which contains 142 fixed bits and includes a guard time of 8.25 bit durations (approximately 30.46 μ s). Frequency Correction Bursts are used for
20 frequency synchronization of mobile terminals. FBs are equivalent to an unmodulated carrier, that is shifted in frequency, but having the same guard time as the normal

burst. FBs are broadcast together with the BCCH. The repetition of FBs is also referred to as the frequency correction channel (FCCH).

5 The third type of burst is the so-called Synchronization Burst (SB), which contains 78 encrypted bits and a guard period of 8.25 bits. Synchronization Bursts contain a 64-bit long training sequence and carry the information about the TDMA frame number (FN) as well as the Base Station Identity Code (BSIC). SBs are used for time synchronization of a
10 mobile terminal and are broadcast together with the frequency correction burst (FB). The repetition of SBs is also referred to as the synchronization channel (SCH).

15 The fourth type of burst is the so-called Access Burst (AB). Access Bursts are used for random access and are characterized by a longer guard period (68.25 bit durations or 252 μ s) to cater for burst transmissions from mobile terminals which may know the timing advance at the time of first access (or following a handover). This longer guard period allows for a mobile station to be up to 35 km from a
20 base station transceiver. In exceptional cases the design may be compatible with cases where the cell radii is larger than 35 Km. ABs are used in the (Packet) Random Access

U.S. Patent Application
Docket No. 27943-00252USPT

Channel (PRACH), after a handover, on the uplink of a channel
used for a voice group call in order to request the use of
that uplink, as well as on the uplink of the Packet Traffic
Control Channel (PTCCH) to allow estimation of the timing
5 advance for a mobile station in packet transfer mode.

For standard GSM systems operating in the 900 MHZ band,
the mobile station transmissions (and concomitantly the
reception by the base stations) occur in the 890-915 MHZ band
while the base station transmissions (and concomitantly the
10 mobile station reception) occur in the 935-960 MHZ band. In
the Extended GSM 900 mode of operation, mobile station
transmissions take place in the 880-915 MHZ band while the
base station transmissions take place in the 925-960 MHZ
band. Thus, GSM systems operating in the 900 MHZ band have
15 194 Radio Frequency (RF) channels having an RF channel
spacing of 200 KHz.

In the DCS 1800 mode of GSM operation, mobile station
transmissions take place in the 1710-1785 MHZ band while base
station transmissions take place in the 1805-1880 MHZ. This
20 provides 374 Radio Frequency channels each having an RF
channel spacing of 200 KHz.

5
10
15

20

30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252

One technique for determining the geographic position of an object (or a mobile station) is to use the satellite-based Global Positioning System (GPS). GPS technology is used in many military and civilian applications. GPS is a satellite navigation system that provides specially coded satellite signals that can be processed in a GPS receiver to yield the position, velocity and time at a receiving unit. Four or more GPS satellite signals are needed to compute the three-dimensional locational coordinates and the time offset of a receiver clock relative to a GPS master clock.

The nominal constellation of the GPS satellites is shown in FIGURE 4. The GPS system 400 comprises twenty-four satellites 401-454 (not counting spares) that orbit the Earth in approximately twelve hours. The satellite orbits repeat virtually the same ground track once every day. The orbital altitude of the GPS satellites is such that the satellites repeat the same ground track and configuration over any point on Earth approximately once every twenty-four hours. As shown in FIGURE 4, the GPS satellites operate in circular 20,200 km (10,900 nm) orbits in six equally-spaced orbital planes inclined at 55° to the Earth's equational

plane. Each orbital plane has four satellites (not counting spares). The spacing of the satellites in orbit is so arranged that a minimum of five (and a maximum of eight) satellites are visible from any point on Earth.

5 The GPS satellites are currently controlled by a set of five land-based control facilities. The master control facility is located in Colorado. The monitor stations receive signals from the satellites that are incorporated into the orbital models for each of the satellites. The
10 models compute precise orbital data (ephemeris data) and satellite clock corrections for each individual satellite. The master control station uploads ephemeris and clock data to the satellites. The satellites then send subsets of the orbital ephemeris data to GPS receivers as radio signals.

15 This is illustrated in FIGURE 5 where an exemplary GPS satellite 510 is shown to communicate with an exemplary GPS receiver 520 over a unidirectional radio frequency data link. The GPS satellite 510 also communicates with the GPS Master Control Station 530 over a bidirectional radio frequency data
20 link that permits the GPS satellite to download information to the control station 530 as well as to receive ephemeris and clock correction data from the control station 530.

FIGURE 6 shows the potential usage of GPS navigational system by aerial, marine and terrestrial receivers. As mentioned earlier, facilitating three dimensional navigation is the primary function of the GPS. GPS receivers convert satellite signals into position, velocity and time estimates. A minimum of four satellites 611-614 are required to compute the three dimensions of position (in cartesian or polar coordinates) and time. GPS navigation receivers are made for use on aircraft 620, ships 630, ground vehicles 640, as well as for hand carrying by individual users 650.

As noted earlier, the GPS system offers two levels of precision in determining the position, velocity and time coordinates at a GPS receiver. The bulk of the civilian users of the GPS system use the Standard Positioning Service (SPS) without charge or governmental restrictions. Most commercially-available GPS receivers are capable of receiving and using the SPS signal. The accuracy of the SPS signals is intentionally degraded by the U.S. Department of Defense. The SPS service has a predictable accuracy of ± 100 meters horizontally, ± 156 meters vertically and ± 340 ns time accuracy.

5 The Precise Positioning Service (PPS) is available to authorized users having cryptographic equipment and keys and specially equipped receivers. The PPS has a predictable accuracy of ± 22 meters horizontally, ± 27.7 meters vertically and ± 100 ns time accuracy.

FIGURE 7 shows the signals generated by a GPS satellite. Each of the GPS satellites transmit two microwave carrier signals, called the L1 and the L2 signals. The L1 frequency (centered at 1575.42 MHz) carries the navigation message and the SPS code signals. As described earlier, the navigation message transmitted by each satellite includes a unique 1023-chip Gold (PRN) code at a rate of 1.023 MHz, such that the full PRN code sequence repeats at one millisecond intervals.

15 The L2 frequency (centered at 1227.60 MHz) is used to measure the ionospheric delay by PPS equipped receivers.

The L1 and L2 microwave carrier signals are phase-shifted by three binary codes. The first of these is the Coarse Acquisition (C/A) code that modulates the phase of the L1 carrier. The C/A signal is a repeating 1.023 MHz Pseudo Random Number (PRN) code that is also a maximal-length shift register sequence. This noise-like code modulates the L1 carrier signal and spreads the spectrum over a 1 MHz

bandwidth. The C/A code is repeated every 1023 bits (i.e., every millisecond). Each GPS satellite has a different C/A PRN code. GPS satellites are often identified by their PRN number, which is a unique identifier for each of the PRN
5 codes. The C/A code that modulates the L1 carrier is the basis for the civilian SPS service.

The second of the binary codes that modulate the L1 and L2 carrier is the Precise Code (P-Code) that modulates the phases of both the L1 and the L2 carriers. The P-Code is a
10 very long, 10.23 MHz PRN code, that takes seven days to transmit completely. In the Anti-Spoofing (AS) mode of operation, the P-Code is encrypted into the Y-Code. The encrypted Y-Code requires a classified AS module for each receiver channel. The Y-Code is intended for use only by
15 authorized users having the appropriate cryptographic keys. The P-Code (or the Y-Code) serves as the basis for the PPS signal.

The third of the binary codes is the Navigational/System Data message that modulates the L1 C/A code signal. The
20 navigation message is a 50 Hz data signal that describe the orbits of the GPS satellites, the clock corrections and other system parameters as described below.

As shown in FIGURE 7, the NAV Code 710 is first summed with the P-Code 720 in the Modulo 2 Summer 730 before modulating the L2 carrier 740 in the Mixer 750. At the same time, the NAV Code 710 is summed with the C/A Code 760 in the Modulo 2 Summer 770 before modulating the L1 Carrier 780 in the Mixer 790. The output of the Mixer 790 is then further mixed (as shown at 795) with the summed NAV Code and P-Code signal that is output by the Modulo 2 Summer 730. The output of the Mixer 795 is the modulated L1 signal while the output of the Mixer 750 is the modulated L2 signal.

FIGURE 8 shows the format of the navigation data signals generated by a GPS satellite. The GPS navigation message consists of time tagged data bits marking the time of transmission of each subframe at the time they are transmitted by the satellite. The GPS Navigational Data frame comprises 1500 bits divided into five 300-bit (six-second) subframes 801-805. A data frame is transmitted every thirty seconds by each of the GPS satellites. The first three of the five subframes contain orbital and clock data: the satellite clock corrections are sent in the first subframe 801 while the ephemeris data parameters for the transmitting satellite are sent in the second and third

subframes 802 and 803, respectively. The fourth and fifth
subframes 804 and 805, respectively, are used to transmit
different pages of system data. An entire set of 25 frames
(i.e., 125 subframes) makes up the complete navigation
5 message that is sent over a time interval of 12.5 minutes.
The Data subframes 801-805 contain parity bits that permit
error detection and limited error correction.

The clock data parameters sent in subframe 801 describe
the satellite clock and the GPS time. The ephemeris data
10 parameters transmitted in subframes 802 and 803 describe the
satellite orbits for short sections of the satellite orbits.
Normally, a GPS receiver gathers new ephemeris data each
hour. However, the GPS architecture permits all data to be
reused for up to four hours without introducing an excessive
15 amount of error. The ephemeris parameters are used with an
algorithm that computes the satellite position for any time
within the period of orbit described by the ephemeris
parameter set.

The unique 50 Hz Navigational/System Data message
20 transmitted by each satellite contains parameters that allow
GPS receivers on earth to compute a precise position
solution. The navigation message includes a precise time

reference as well as parameters that precisely describe the orbital positions and clock corrections for each of the GPS satellites. In general, GPS receivers compute a position solution by first searching for all visible satellites. This task is accomplished by correlating the received signal with replicas of the respective Gold codes, demodulating the Navigational Data message broadcast by each of the visible satellites to obtain a time reference and orbital position, computing a range estimate for each visible satellite that includes the GPS receiver clock uncertainty, and, if at least four satellites are visible, computing the GPS receiver position and clock correction using the range estimates.

Almanacs are approximate orbital data parameters for all of the satellites of the GPS system. The ten parameter almanacs describe satellite orbits over extended period of time which may be useful for several months in certain cases. A set of ten parameter almanacs for all satellites is sent by each satellite over a period of 12.5 minutes or more as described earlier. The signal acquisition time at receiver startup can be significantly aided by the availability of current almanacs. The proximate orbital data as received at a receiver is used to preset the receiver at the approximate

position and carrier Doppler frequency (the frequency shift caused by the rate of change in range to the moving satellite) of each satellite in the GPS constellation.

As noted earlier, the GPS system permits the efficient and accurate calculation of the position and time of a GPS receiver that may move at a speed of up to 500 Kmph. The GPS system has multiple modes of usage. Code phase tracking is used for GPS-based navigation. In code phase tracking, the GPS receiver produces replicas of the Coarse Acquisition (C/A) (i.e., the PRN code) and/or the P-Code. Each Pseudo Random Number (PRN) code is a noise-like but predetermined unique series of bits. The receiver produces the C/A code sequence for a specific satellite using some form of a code generator. Modern receivers usually store a complete set of precomputed C/A code chips in memory although a hardware-based shift register implementation may also be used.

A simplified GPS receiver block diagram is shown in FIGURE 9. The exemplary GPS receiver 900 receives the navigation message from the GPS satellite via antenna 910. The radio frequency signal is received with the antenna is then fed to the preamplifier and down converter 920. A clock

signal from the clock 960 is supplied as an input to the preamplifier and down converter 920. A C/A code generator 950 driven by the clock 960 generates a set of code chips that is fed to a mixer 930 along with the output of the preamplifier 920. The output of the mixer 930 is fed to a data bit demodulation and code control unit 940 to yield the Navigational Data message in the GPS carrier signal.

In one embodiment of the present invention, a phase-locked loop that locks to either a positive or negative hop cycle (i.e., a bi-phase lock loop) is used to demodulate the 50 Hz navigation message from the L1 GPS carrier signal. The same loop can also be used to measure and track the carrier frequency (i.e., the Doppler shift) and, by keeping track of the changes to the numerically controlled oscillator, the phase of the L1 carrier frequency can also be tracked and measured. The processing unit 970 in the GPS receiver uses the navigational message generated by the data bit demodulation and code control unit 940, along with the C/A code measurement from the C/A code generator 950, and the time measurement from the clock 960 to generate the position, velocity and time 980 of the remote receiver.

5 The receiver position, velocity and time in Cartesian
coordinates is converted within the receiver to geodetic
latitude, longitude and height estimates above a reference
ellipsoid. The velocity at the receiver is computed from
changes and position over time, the satellite doppler
frequency or both. The time at the remote receiver is
computed in terms of the satellite time, the GPS time and/or
the UTC time. The satellite time is the time maintained by
each satellite. Each satellite contains four atomic clocks
10 (two cesium-based and two rubidium-based). Satellite clocks
are monitored by ground control stations and occasionally
reset to maintain time to within 1 ms of the true GPS time
as maintained at the Master Control Facility. Clock
correction data bits reflect the offset of each satellite
15 from the GPS time. The satellite time is set in the receiver
from the GPS signals.

20 Navigational data subframes are transmitted every six
seconds and contain bits that resolve the Time of the Week
(TOW) to within six seconds. The 50 Hz GPS navigational data
bit stream is aligned with the C/A code transitions so that
the arrival time of a data bit edge on a 20 ms interval
resolves the pseudo range to the nearest millisecond. The

approximate range to the satellite resolves the 20 ms ambiguity, and the C/A code measurements can represent times to fractional milliseconds. The use of multiple satellites and a navigational solution (or a known position of a timing receiver) permit the satellite time to be set to an accuracy that is limited only by the position error and the pseudo range error for each satellite.

The first subframe 1001 of the navigational data frame 800 contains the Time of the Week (TOW) estimate 1011 along with the satellite clock parameters 1012. The Time of the Week estimate 1011 is fed to a converter unit 1070 that converts it to a satellite time estimate 1071. The second and the third subframes (1002 and 1003 respectively) of the navigational data frame 800 contain ephemeris data 1013 & 1014, respectively, that are fed to a converter unit 1020 that extracts the relativistic term 1021 as well as the range 1051 of the satellite from the receiver.

The relativistic term 1021 along with the satellite clock parameters 1012 are fed to a satellite time correction unit 1010 to generate the relative difference between the satellite time and the GPS time. This correction 1041 to the satellite time is fed to a correction unit 1075 along with

the satellite time estimate 1071 to yield the GPS time 1076
at the satellite. The range estimate 1051 of distance
between the receiver and the satellite is then used to
convert the GPS time at the satellite 1076 to the GPS time
5 at the receiver 1081 in a conversion unit 1080.

The fourth subframe 1004 of the navigational data
message 800 contains UTC parameters 1015 that are fed to a
UTC-to-GPS correction unit 1030 to yield the UTC-to-GPS
correction term 1061. The UTC-to-GPS correction term 1061
10 is then fed along with the GPS time at the receiver 1081 to
a GPS-to-UTC converter 1085 to yield the correct Universal
Coordinated Time (UTC) 1090 at the receiver.

As noted earlier the startup of a GPS receiver typically
requires the acquisition of a set of navigational parameters
15 from the navigational data signals of four or more GPS
satellites. This process of initializing a GPS receiver may
often take several minutes.

The duration of the GPS positioning process is directly
dependent upon how much locational and time information that
20 a GPS receiver has. Most GPS receivers are programmed with
almanac data, which coarsely describe the expected satellite
positions for up to one year ahead. However, if a GPS

receiver does not have some knowledge of its own approximate location, then the GPS receiver cannot correlate signals from the visible satellites fast enough, and therefore, cannot calculate its position quickly.

5 Furthermore, it should be noted that higher a signal strength is needed for capturing the C/A Code and the NAV Code at start-up than is needed for continued monitoring of an already-acquired signal. It should also be noted that the process of monitoring the GPS signal is significantly
10 affected by environmental factors. Thus, a GPS signal which may be easily acquired in the open becomes progressively harder to acquire when a receiver is under foliage, in a vehicle, or worst of all, in a building.

 Recent governmental mandates, e.g., the response time
15 requirements of the FCC Phase II E-911 service, have made it imperative that the exact position of a mobile handset be determined in an expedited manner. Thus, in order to implement a GPS receiver effectively within a mobile terminal while also meeting the demands for expedited and accurate
20 positioning, it has become necessary to be able to quickly provide mobile terminals with accurate assistance data, e.g., local time and position estimates, satellite ephemeris and

clock information (which may vary with the location of the mobile station). The system and method of the present invention can permit a GPS receiver that is integrated with or connected to a mobile station to use such assistance data to expedite the completion of its start-up procedures. The present invention offers a technique to send the necessary assistance GPS information over a GSM wireless network to a GPS receiver that is integrated with or connected to a mobile terminal.

10 The system and method of the present invention can be best explained by reference to FIGURE 11 of the drawings, wherein a requesting Location Application (LA) 1150 requests information about the position of a Mobile Station (MS) 1100 within a Public Land Mobile Network (PLMN) 1190, the positioning request is forwarded to a Mobile Location Center 15 1140 serving the PLMN 1190. It should be noted that the LA 1150 can be an external node, within the cellular PLMN network 1190, or within the MS 1100 itself. Thereafter, the MLC 1140 requests, from a Mobile Switching Center/Visitor Location Register (MSC/VLR) 1130 serving the area that the 20 MS 1100 is in, the cell ID corresponding to a cell 1195 that the MS 1100 is currently located in. If the MS 1100 is in

idle mode, e.g., not in use, the MLC 1140 can then instruct the MSC/VLR 1130 to page the MS 1100 via a Base Station Controller (BSC) 1120 and a serving Base Transceiver Station (BTS) 1110 to determine the cell ID for the cell 1195 that the MS 1100 is located in. This cell ID is then sent back to the MLC 1140 from the MSC/VLR 1130. If, however, the MS 1100 is in busy mode, e.g., in use, the cell ID information is already known by the MSC/VLR 1130 and is sent by the MSC/VLR 1130 to the MLC 1140, upon request.

Once the MLC 1140 receives the cell ID from the MSC/VLR 1130, the MLC 1140 can determine the coordinates of the serving BTS 1110, which preferably serves as the initial local position estimate for the MS 1100, and from this information, using, for example, a look-up table 1145, the MLC 1140 can determine a reference GPS receiver 1160, which is valid for the cell 1195 that the MS 1100 is located in.

Alternatively, the MLC 1140 can determine the correct reference GPS receiver 1160 just from the cell ID, using another look-up table 1145. In addition, alternative ways of determining the correct reference GPS receiver 1160 can be used instead of the look-up table 1145 described herein. Alternatively, certain countries may have regulations against

transmitting cell-site location information. In this case, the local position estimate can be quantitized to approximately one-kilometer granularity, which can then be used to determine the correct reference GPS receiver 1160.

5 Multiple reference GPS receivers 1160 and 1170 are spaced throughout the PLMN 1190 in order to provide accurate assistance GPS data to GPS receivers 1105 within or attached to MS's 1100. This data is used by the GPS receiver 1105 incorporated in or associated with a mobile terminal to
10 determine the location of the MS 1100 within the PLMN 1190. The data in each reference GPS receiver 1160 and 1170 is valid in a radius of up to 300 kilometers around the reference GPS receiver 1160 and 1170 site (except for differential correction information, which is only valid for
15 a radius of up to 50 kilometers), and therefore, the correct reference GPS receiver 1160 for the cell 1195 that the MS 1100 is in must be determined to ensure the accuracy of the assistance GPS data. In addition, each reference GPS receiver 1160 and 1170 must be placed such that the antenna
20 has an unobstructed view of the full sky.

After the MLC 1140 has determined the correct reference GPS receiver 1160, the MLC 1140 then obtains, from the

reference GPS receiver 1160, the relevant assistance GPS data, such as the identity of the visible satellites 1180, the orbital parameters of the satellites 1180, clock corrections and differential corrections. A current
5 requirement is that this assistance data to be updated by the reference GPS receivers 1160 and 1170 about every thirty minutes (except for differential corrections, which are updated about every five seconds).

In alternative embodiments, the differential corrections
10 can be sent from the correct reference GPS receiver 1160 to the MLC 1140 and then be forwarded to the serving BTS 1110 for that cell 1195 to be broadcast on, for example, a Broadcast Control Channel (BCCH), to MS's 1100 within the cell 1195 about every five seconds. Therefore, this
15 information does not need to be collected by the MLC 1140 when a positioning request comes in and then subsequently sent to the MS 1100 to be positioned, which could take more than five seconds. Advantageously, by continuously broadcasting the differential corrections every five seconds,
20 the MS 1100 will always have updated differential correction information.

262227 6676257

The MLC 1140 can collect the assistance GPS data by querying the correct reference GPS receiver 1160 for the latest assistance GPS data when a positioning request comes in. Alternatively, each reference GPS receiver 1160 and 1170 within the PLMN 1190 can update the MLC 1140, e.g., every thirty minutes, and store, within a database 1148 within the MLC 1140, the current assistance GPS data for that reference GPS receiver 1160 and 1170. Thus, when a positioning request comes in, the MLC 1140 need only access that stored information associated with the correct reference GPS receiver 1160 when the correct reference GPS receiver 1160 is ascertained. In either case, once the current assistance GPS data is obtained by the MLC 1140, this information is forwarded to the built-in or attached GPS receiver 205 within the MS 1100 via the MSC/VLR 1130, BSC 1120 and BTS 1110. For example, the current assistance data can be sent to the MS 1100 within a Short Message Service (SMS) message.

Using this assistance GPS data, the built-in GPS receiver 1105 within the MS 1100 can calculate its position, e.g., latitude and longitude, and send this location information back to the MLC 1140, in, for example, an SMS message. Thereafter, the MLC 1140 can forward the location

U.S. Patent Application
Docket No. 27943-00252USPT

of the MS 1100 to the requesting Location Application (LA)
1150.

Advantageously, by providing the MS 1100 with an
integrated GPS receiver 1105 and the necessary assistance GPS
5 data, the integrated GPS receiver 205 can calculate its
position relatively quickly. Without this information, a GPS
receiver 1170 typically requires between approximately 15
seconds and 30 minutes. However, with the provisioning of
the assistance GPS data to the GPS receiver 1105 within the
10 MS 1100 through the cellular network 1190, positioning can
potentially be performed within about 5 seconds. In
addition, the accuracy of the MS 1100 location can be
improved to a radius of about 5 meters with the differential
correction information, instead of the radius of a cell (500
15 m to 35 km radius) or a location area, as in previous
solutions.

It should be noted that the location services can be
used by applications located-in or connected-to the
subscriber's MS, by network applications or by external
20 applications. Furthermore, it should be understood that the
positioning systems and methods disclosed herein can be
utilized by any cellular network, including, but not limited

to the Global System for Mobile Communications (GSM) network, the Personal Communications Systems (PCS) network, the AMPS network and the D-AMPS network.

FIGURE 12 shows the use of a timing reference between the GPS clock signal and the GSM TDMA frame number that permits the accurate and speedy estimation of the location of a mobile GPS receiver that is integrated with or connected to a mobile terminal. As noted earlier, fast code start is very important in order to implement the FCC Phase II E-911 response time requirements. In the preferred embodiment of the present invention, the GSM TDMA frame numbers 1220 are correlated with the GPS time at a reference receiver 1230. This correlator 1210 can reside either in the network or at the Base Station Controller (BSC). The correlation is then broadcast to the mobile station through the cell broadcast (CB) feature of the GSM Short Messaging Service (SMS) or through the GSM Broadcast Control Channel (BCCH) as system information. In a further embodiment of the present invention, the use of the time-delay parameter in the mobile terminal may be used to refine the GPS time estimates at the mobile station and can thus be used to permit a mobile to speedily estimate its proximate position during the startup

of an GPS receiver that is integrated with the mobile terminal.

Although preferred embodiments of the method and apparatus of the present invention have been illustrated in
5 the accompanying drawings and described in the foregoing detailed description, it is to be understood that the invention is not limited to the exemplary embodiments disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the
10 spirit of the invention as set forth and defined by the following claims.

WHAT IS CLAIMED IS:

1 1. In a wireless telecommunications system having a
2 Base Transceiver Station (BTS) and a mobile terminal equipped
3 with a Global Positioning System (GPS) equipped receiver, the
4 Base Transceiver Station having operational control of the
5 GPS-equipped mobile terminal, a method for determining the
6 approximate position of the GPS-equipped mobile terminal,
7 said method comprising the steps of:
8 demodulating signals received from a multiplicity
9 of GPS satellites at a reference GPS receiver, said reference
10 GPS receiver being connected to the wireless
11 telecommunications system and having a determinate physical
12 location relative to the Base Transceiver Station;
13 recovering respective navigational data signals
14 from each of said demodulated GPS signals;
15 originating a request for approximate navigational
16 information from the GPS-equipped mobile terminal to the Base
17 Transceiver Station;
18 transmitting recovered navigational data signals
19 to the GPS-equipped mobile terminal responsive to said
20 request for approximate navigational information; and

U.S. Patent Application
Docket No. 27943-00252USPT

21 determining, from said transmitted navigational
22 data signals, the approximate location of the GPS-equipped
23 mobile terminal.

1 2. The method according to Claim 1, wherein said
2 signals from the GPS satellites are Standard Positioning
3 Service (SPS) signals received on an L1 frequency, said L1
4 frequency being centered at about 1575.42 MHz.

1 3. The method according to Claim 1, wherein said
2 signals from the GPS satellites are Precise Positioning
3 Service (PPS) signals received on an L2 frequency, said L2
4 frequency being centered at about 1227.60 MHz.

1 4. The method according to Claim 1, wherein said
2 approximate navigational information comprises the identities
3 of a plurality of GPS satellites within ranging distance, the
4 orbital parameters associated with said plurality of GPS
5 satellites, clock correction information and differential
6 correction information associated with said plurality of GPS
7 satellites.

1 5. The method according to Claim 1, wherein said step
2 of originating said request for approximate locational
3 information from the GPS-equipped mobile terminal to the Base
4 Transceiver Station is responsive to activation of the mobile
5 terminal.

1 6. The method according to Claim 1, wherein said step
2 of originating said request for approximate locational
3 information from the GPS-equipped mobile terminal to the Base
4 Transceiver Station is responsive to placing a call from the
5 GPS-equipped mobile terminal to one of a set of designated
6 numbers.

1 7. The method according to Claim 6, wherein said one
2 designated number is associated with an emergency service.

1 8. The method according to Claim 1, wherein said step
2 of originating said request for approximate locational
3 information from the GPS-equipped mobile terminal to the Base
4 Transceiver Station is responsive to a determination by the
5 reference GPS receiver that the GPS signal strength at the
6 GPS-equipped mobile terminal is inadequate to permit

7 initialization of the reference GPS receiver associated with
8 the GPS-equipped mobile terminal within a desired response
9 time.

1 9. The method according to Claim 1, wherein said step
2 of transmitting is performed as a Cell Broadcast (CB) Short
3 Message Service (SMS) message of the wireless
4 telecommunications system.

1 10. The method according to Claim 1, wherein said step
2 of transmitting is performed over a Broadcast Control Channel
3 (BCCH) of the wireless telecommunications system.

1 11. The method according to Claim 1, further comprising
2 the step of:

3 periodically transmitting a Timing Advance
4 parameter from the Base Transceiver Station to the GPS-
5 equipped mobile terminal to dynamically compensate for
6 varying distances between the GPS-equipped mobile terminal
7 and the Base Transceiver Station.

1 12. The method according to Claim 11, further
2 comprising the step of:

3 refining said approximate location of the GPS-
4 equipped mobile terminal using said Timing Advance parameter.

1 13. In a wireless telecommunications system having a
2 Base Transceiver Station and a mobile terminal equipped with
3 a Global Positioning System (GPS) receiver, the Base
4 Transceiver Station having operational control of the GPS-
5 equipped mobile terminal, a method for determining the
6 approximate position of the GPS-equipped mobile terminal,
7 said method comprising the steps of:

8 demodulating signals received from a multiplicity
9 of GPS satellites at a reference GPS receiver, said reference
10 GPS receiver being connected to the wireless
11 telecommunications system and having a determinate physical
12 location relative to the Base Transceiver Station;

13 computing an estimated location of said reference
14 GPS receiver using said demodulated signals from said GPS
15 satellites;

16 originating a request for approximate locational
17 information from the GPS-equipped mobile terminal to the Base
18 Transceiver Station;

19 transmitting said estimated location of said
20 reference GPS receiver from the Base Transceiver Station to
21 the GPS-equipped mobile terminal responsive to said request
22 for approximate locational information; and

23 determining, from said transmitted location of said
24 reference GPS receiver, the approximate location of the GPS-
25 equipped mobile terminal.

1 14. The method according to Claim 13, wherein said step
2 of computing the estimated location of said reference GPS
3 receiver further comprises the steps of:

4 recovering respective navigational data signals
5 from each of said demodulated GPS signals from said GPS
6 satellites; and

7 computing, from the respective navigational data
8 signals, the location of said reference GPS receiver.

1 15. The method according to Claim 14, wherein said
2 respective navigational data signals comprise orbital

3 parameters associated with a plurality of GPS satellites,
4 clock correction information and differential correction
5 information.

1 16. The method according to Claim 13, wherein said
2 method further comprises, after said step of computing and
3 before said step of originating, the step of:

4 storing said estimated location of said reference
5 GPS receiver in said wireless telecommunications system.

1 17. The method according to Claim 13, wherein said step
2 of originating said request for approximate locational
3 information from the GPS-equipped mobile terminal to the Base
4 Transceiver Station is responsive to activation of the GPS-
5 equipped mobile terminal.

1 18. The method according to Claim 13, wherein said step
2 of originating said request for approximate locational
3 information from the GPS-equipped mobile terminal to the Base
4 Transceiver Station is responsive to placing a call from the
5 GPS-equipped mobile terminal to one of a set of designated
6 numbers.

1 19. The method according to Claim 18, wherein said one
2 designated number is associated with an emergency service.

1 20. The method according to Claim 13, wherein said step
2 of originating said request for approximate locational
3 information from the GPS-equipped mobile terminal to the Base
4 Transceiver Station is responsive to a determination by the
5 reference GPS receiver that GPS signal strength at the GPS-
6 equipped mobile terminal is inadequate to permit
7 initialization of the reference GPS receiver associated with
8 the GPS-equipped mobile terminal within a desired response
9 time.

1 21. The method according to Claim 13, wherein said step
2 of transmitting is performed as a Cell Broadcast (CB) Short
3 Message Service (SMS) message over the wireless
4 telecommunications system.

1 22. The method according to Claim 13, wherein said step
2 of transmitting is performed over a Broadcast Control Channel
3 (BCCH) of the wireless telecommunications system.

1 23. The method according to Claim 13, wherein the
2 estimated location of said reference GPS receiver is used as
3 the approximate location of the GPS-equipped mobile terminal.

1 24. In a wireless telecommunications system having a
2 Base Transceiver Station and a mobile terminal equipped with
3 a Global Positioning System (GPS) receiver, the Base
4 Transceiver Station having operational control of the GPS-
5 equipped mobile terminal, a system for determining the
6 approximate position of the GPS-equipped mobile terminal,
7 said system comprising:

8 demodulation means for demodulating signals
9 received from a multiplicity of GPS satellites at a reference
10 GPS receiver, said reference GPS receiver being connected to
11 the wireless telecommunications system and having a
12 determinate physical location relative to the Base
13 Transceiver Station;

14 signal recovery means for recovering navigational
15 data signals from each of said demodulated signals from said
16 GPS satellites;

17 requesting means for requesting approximate
18 navigational information for the GPS-equipped mobile terminal
19 from the Base Transceiver Station;

20 transmission means for transmitting said recovered
21 navigational data signals to the GPS-equipped mobile terminal
22 responsive to said request for approximate navigational
23 information; and

24 determination means for determining, from said
25 transmitted navigational data signals to determine the
26 approximate location of the GPS-equipped mobile terminal.

1 25. The system according to Claim 24, wherein said
2 signals from the GPS satellites are Standard Positioning
3 Service (SPS) signals received on an L1 frequency, said L1
4 frequency being centered at about 1575.42 MHz.

1 26. The system according to Claim 24, wherein said
2 signals from the GPS satellites are Precise Positioning
3 Service (PPS) signals received on an L2 frequency, said L2
4 frequency being centered at about 1227.60 MHz.

1 27. The system according to Claim 24, wherein said
2 approximate navigational information comprises the identities
3 of a plurality of GPS satellites within ranging distance, the
4 orbital parameters associated with said plurality of GPS
5 satellites, clock correction information and differential
6 correction information associated with said plurality of GPS
7 satellites.

1 28. The system according to Claim 24, wherein said
2 requesting means is responsive to activation of the mobile
3 terminal.

1 29. The system according to Claim 24, wherein said
2 requesting means is responsive to placing a call from the
3 GPS-equipped mobile terminal to one of a set of designated
4 numbers.

1 30. The system according to Claim 24, wherein said one
2 designated number is associated with an emergency service.

3 31. The system according to Claim 24, wherein said
4 requesting means is responsive to a determination by the
5 reference GPS receiver that GPS signal strength at the GPS-
6 equipped mobile terminal is inadequate to permit the
7 initialization of the reference GPS receiver associated with
8 the GPS-equipped mobile terminal within a desired response
9 time.

1 32. The system according to Claim 24, wherein said
2 transmission means comprises a Cell Broadcast (CB) Short
3 Message Service (SMS) message over the wireless
4 telecommunications system.

1 33. The system according to Claim 24, wherein said
2 transmission means comprises a Broadcast Control Channel
3 (BCCH) of the wireless telecommunications system.

1 34. The system according to Claim 24, further
2 comprising:

3 means for periodically transmitting a Timing
4 Advance parameter from the Base Transceiver Station to the
5 GPS-equipped mobile terminal to dynamically compensate for

6 varying distances between the GPS-equipped mobile terminal
7 and the Base Transceiver Station.

1 35. The system according to Claim 34, further
2 comprising:

3 means for refining said approximate location of the
4 GPS-equipped mobile terminal using said Timing Advance
5 parameter.

1 36. In a wireless telecommunications system having a
2 Base Transceiver Station and a mobile terminal equipped with
3 a Global Positioning System (GPS) receiver, the Base
4 Transceiver Station having operational control of the GPS-
5 equipped mobile terminal, a system for determining the
6 approximate position of the GPS-equipped mobile terminal,
7 said system comprising:

8 a demodulator for demodulating signals received
9 from a multiplicity of GPS satellites at a reference GPS
10 receiver, said reference GPS receiver being connected to the
11 wireless telecommunications system and having a determinate
12 physical location relative to the Base Transceiver Station;

13 computing means for determining an estimated
14 location of said reference GPS receiver using said
15 demodulated signals from said GPS satellites;

16 requesting means for requesting approximate
17 locational information from the GPS-equipped mobile terminal
18 to the Base Transceiver Station;

19 a transmitter for transmitting the location of said
20 reference GPS receiver from the Base Transceiver Station to
21 the GPS-equipped mobile terminal responsive to said request
22 for said approximate locational information; and

23 determination means for determining the approximate
24 location of the GPS-equipped mobile terminal using said
25 transmitted location of said reference GPS receiver.

1 37. The system according to Claim 36, wherein said
2 computing means further comprises:

3 decoder means for recovering respective
4 navigational data signals from each of said demodulated
5 signals from said GPS satellites; and

6 computing means for computing the location of said
7 reference GPS receiver from said respective navigational data
8 signals.

U.S. Patent Application
Docket No. 27943-00252USPT

1 38. The system according to Claim 37, wherein said
2 respective navigational data signals comprise the orbital
3 parameters associated with a plurality of GPS satellites,
4 clock correction information and differential correction
5 information.

1 39. The system according to Claim 36, wherein said
2 computing means further comprises:

3 storage means for storing said estimated location
4 of said reference GPS receiver in said wireless
5 telecommunications system.

1 40. The system according to Claim 36, wherein said
2 requesting means is responsive to activation of the mobile
3 terminal.

1 41. The system according to Claim 36, wherein said
2 requesting means is responsive to placing a call from the
3 GPS-equipped mobile terminal to one of a set of designated
4 numbers.

U.S. Patent Application
Docket No. 27943-00252USPT

1 42. The system according to Claim 41, wherein said one
2 designated number is associated with an emergency service.

1 43. The system according to Claim 36, wherein said
2 requesting means is responsive to a determination by the
3 reference GPS receiver that GPS signal strength at the GPS-
4 equipped mobile terminal is inadequate to permit
5 initialization of the reference GPS receiver associated with
6 the GPS-equipped mobile terminal within a desired response
7 time.

1 44. The system according to Claim 36, wherein said
2 transmitter transmits a Cell Broadcast (CB) Short Message
3 Service (SMS) message over the wireless telecommunications
4 system.

1 45. The system according to Claim 36, wherein said
2 transmitter transmits over a Broadcast Control Channel (BCCH)
3 of the wireless telecommunications system.

Abstract—The purpose of this study was to determine the effect of a 10-week, 30-min, 3 times per week, supervised, low-impact aerobically and resistance training program on the physical fitness of sedentary, middle-aged women. The program was designed to improve cardiovascular fitness, muscular strength, and endurance. The program was evaluated using a pretest and a posttest. The pretest was conducted at the beginning of the program, and the posttest was conducted at the end of the program. The results of the study showed that the program had a significant effect on the physical fitness of the women. The women who participated in the program showed significant improvements in cardiovascular fitness, muscular strength, and endurance compared to the women who did not participate in the program. The program was found to be an effective means of improving the physical fitness of sedentary, middle-aged women.

- 1
- 2
- 3

ABSTRACT

5 A telecommunications system and method for rapid start-up of a Global Position System (GPS) receiver integrated with a mobile terminal is disclosed. The location of a reference GPS receiver associated with a Base Transceiver Station (BTS) within the cell that the mobile terminal is currently located is used as the local position estimate for that mobile terminal. The GSM TDMA frame numbers are first correlated with the GPS clock signal. Optionally, this correlation is
10 adjusted using the adaptive frame alignment mechanism. This local position estimate is used to ascertain the location of the GPS receiver. The correlation data is then sent to the GPS-capable mobile terminal through the Short Messaging Service (SMS) cell broadcast facility or the Broadcast Control Channel (BCCH) facility of the GSM network to enable
15 the built-in GPS receiver to calculate its position relatively quickly.

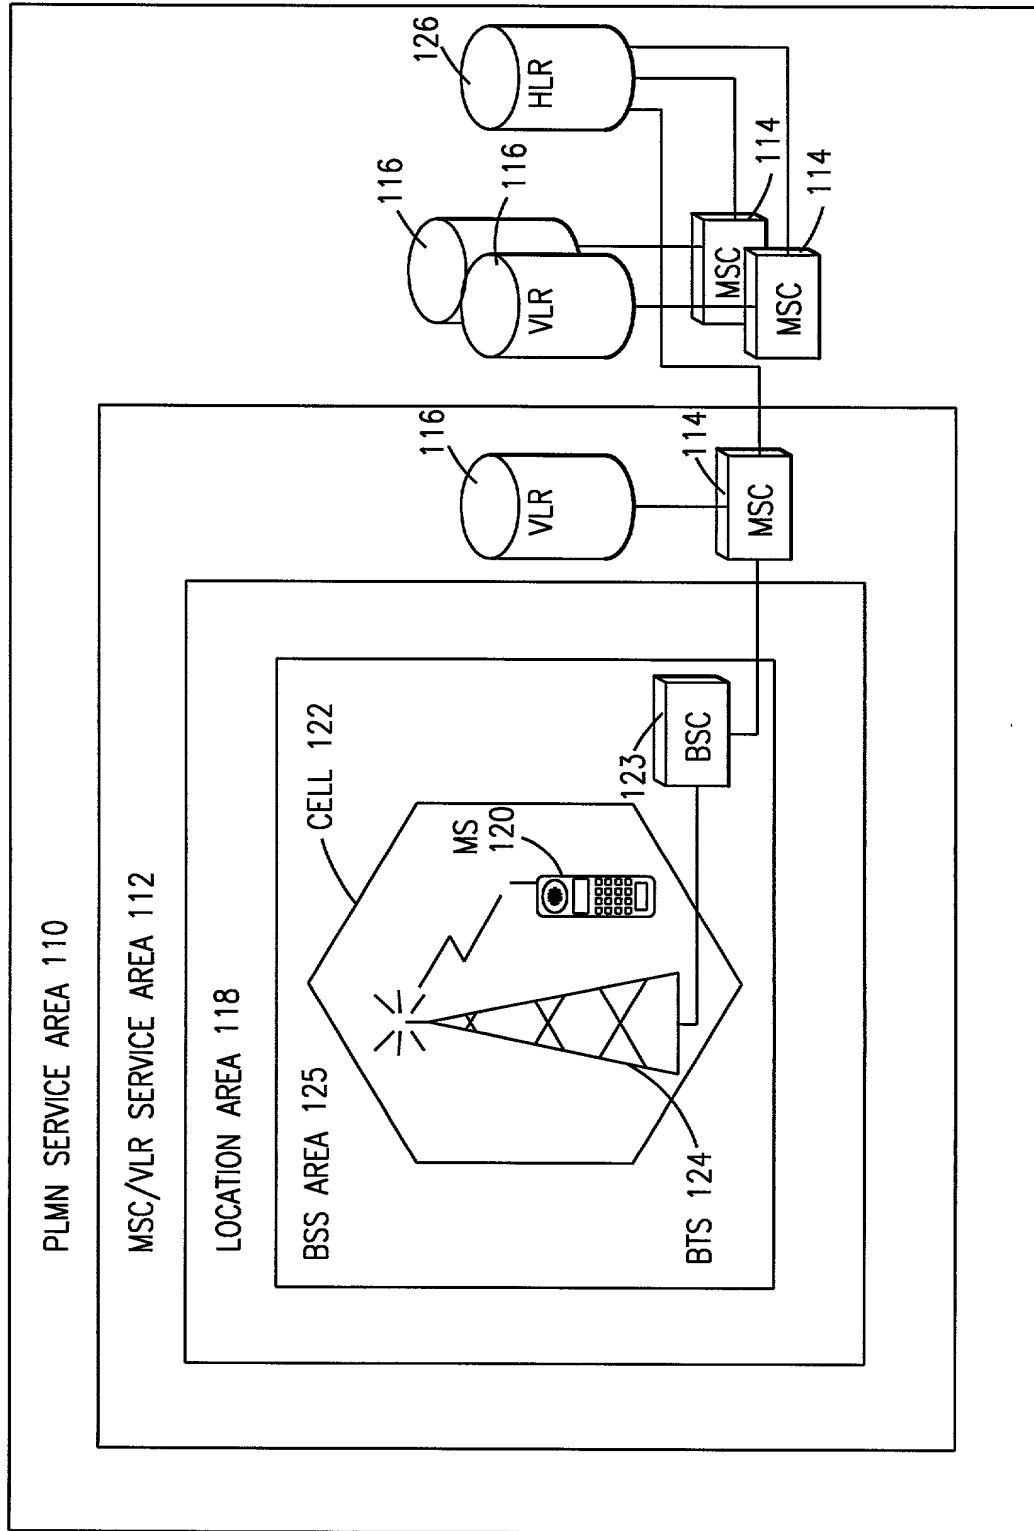


FIG. 1

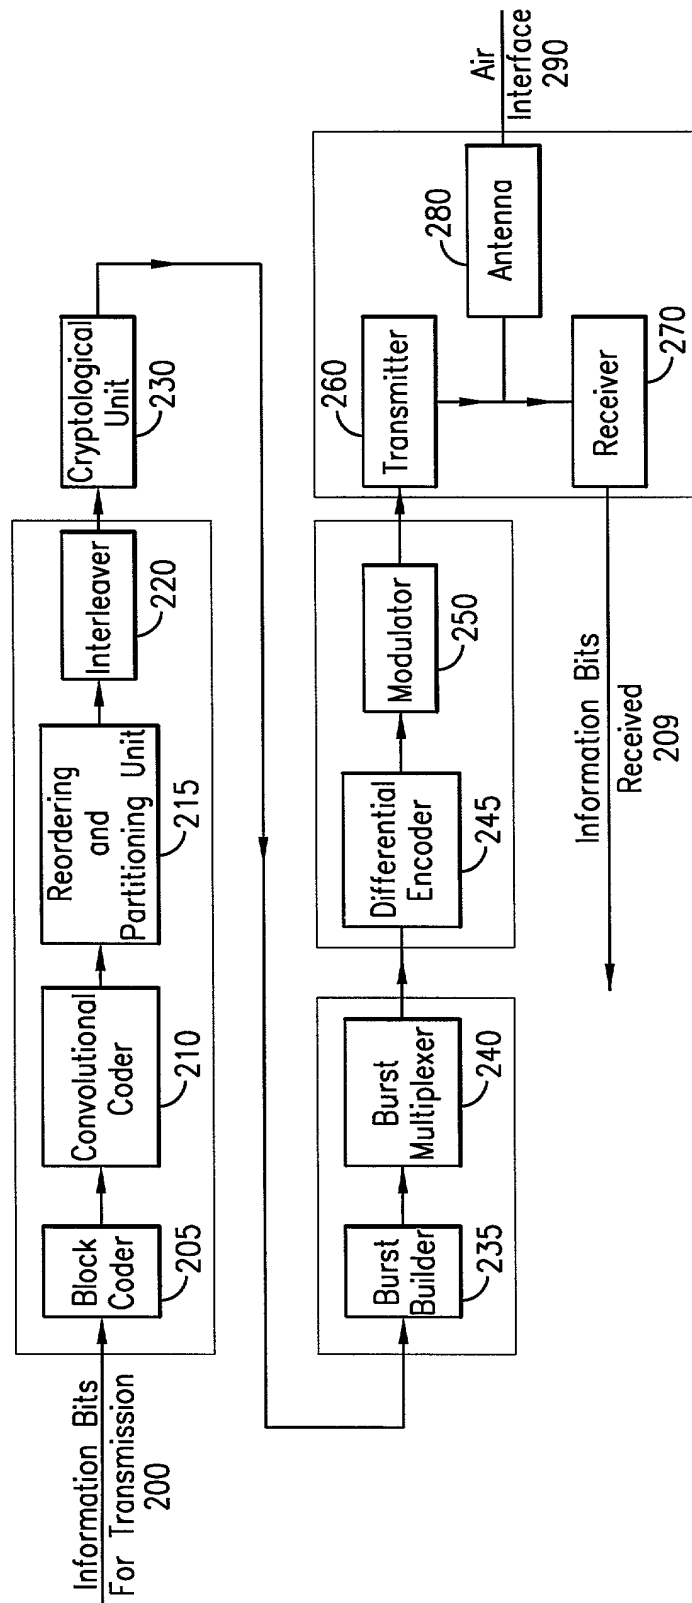


FIG. 2

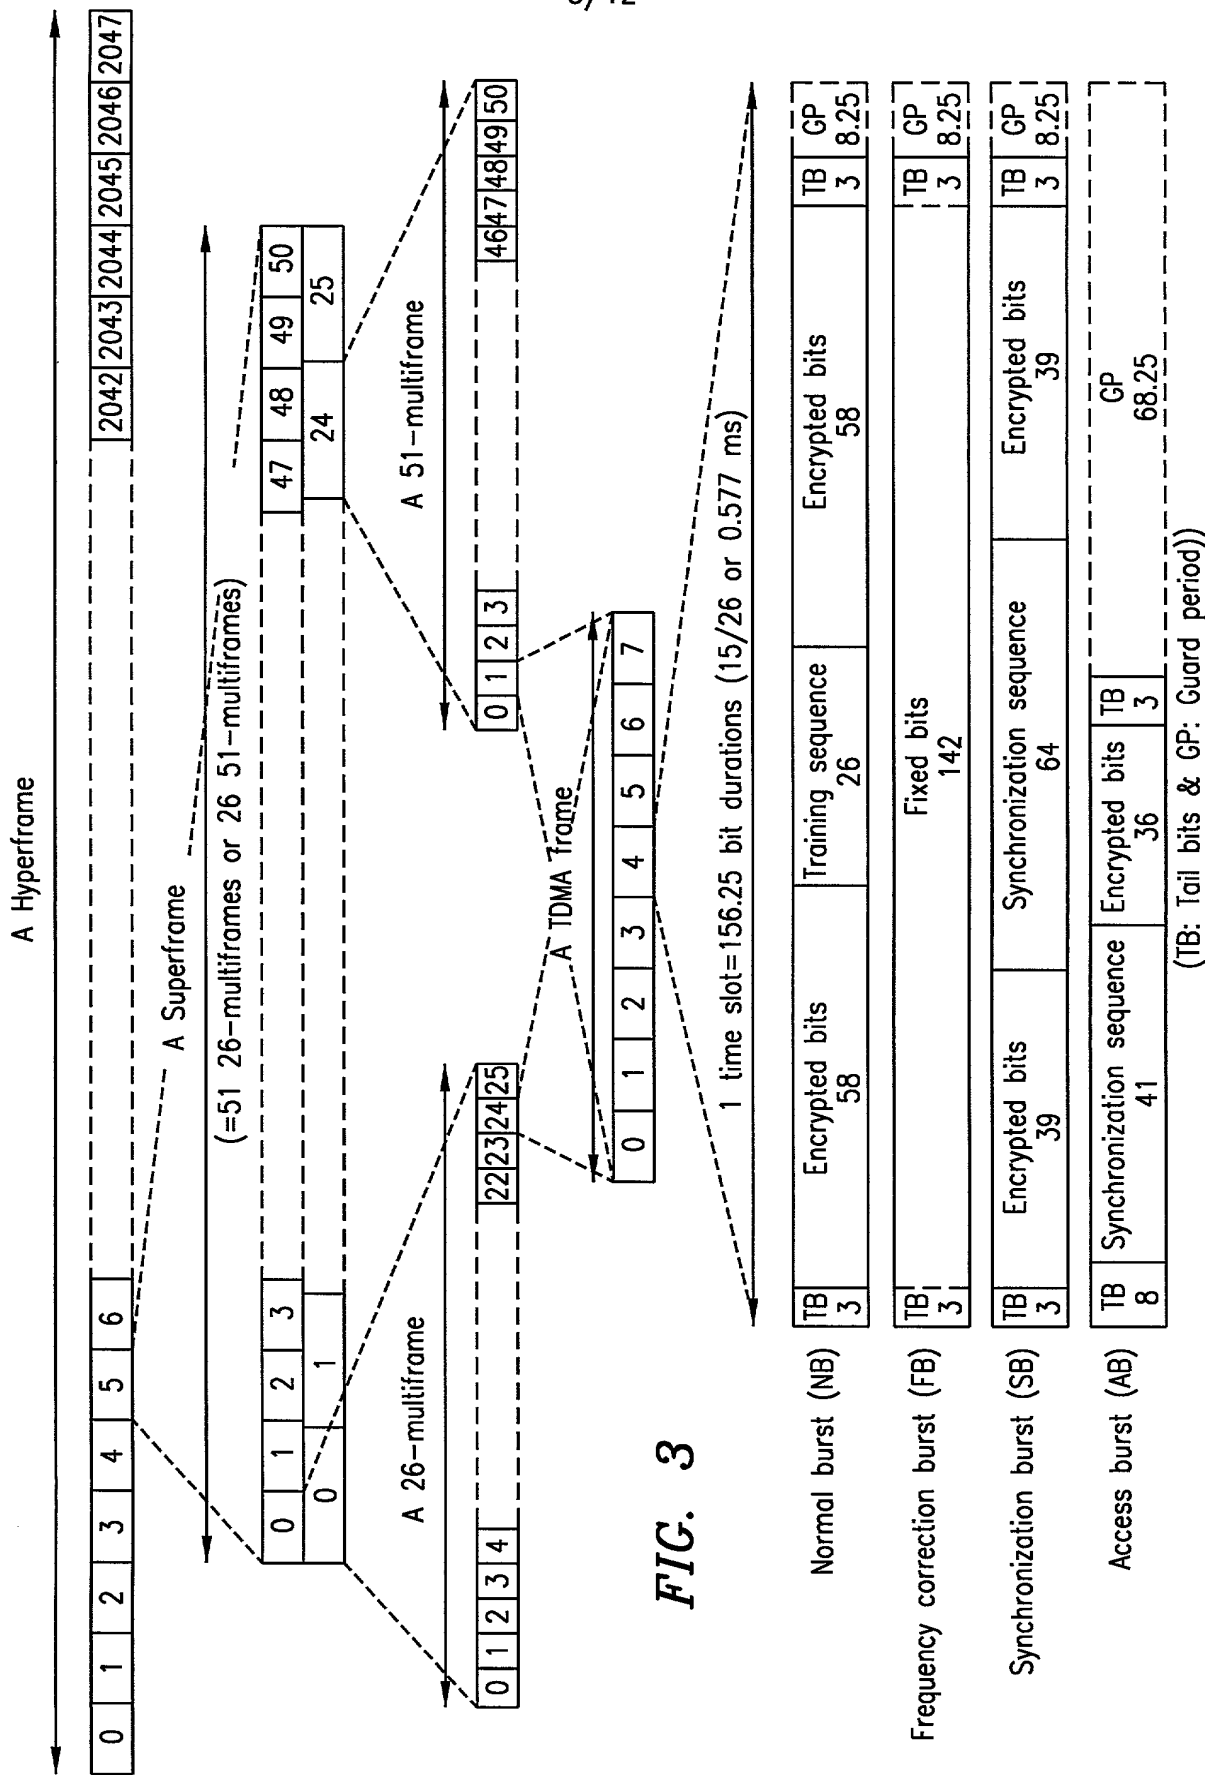


FIG. 3

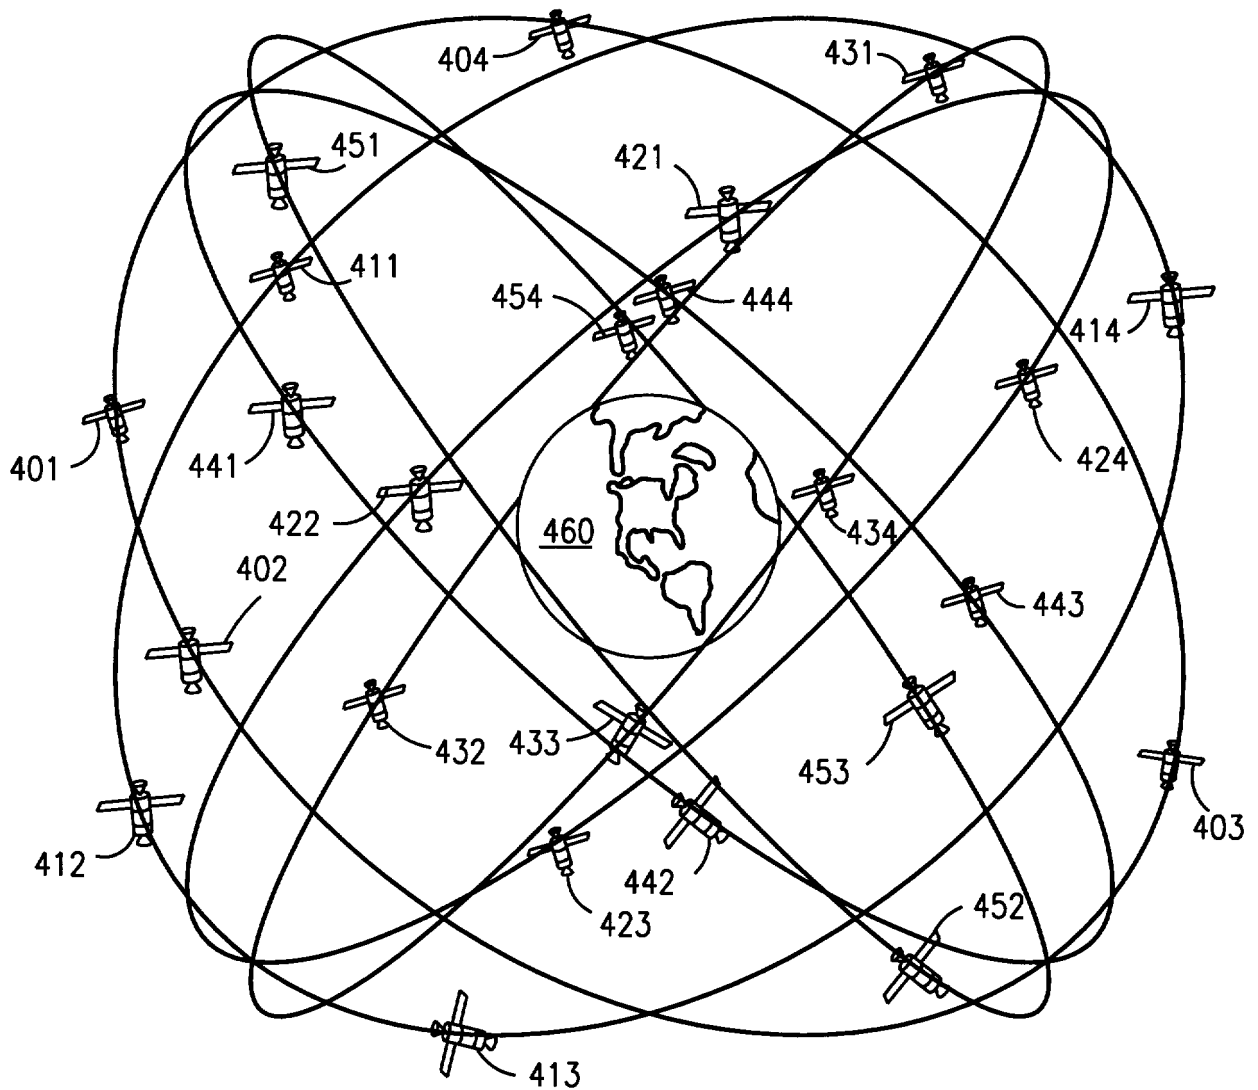


FIG. 4

00019199-12200

SCANNED 4

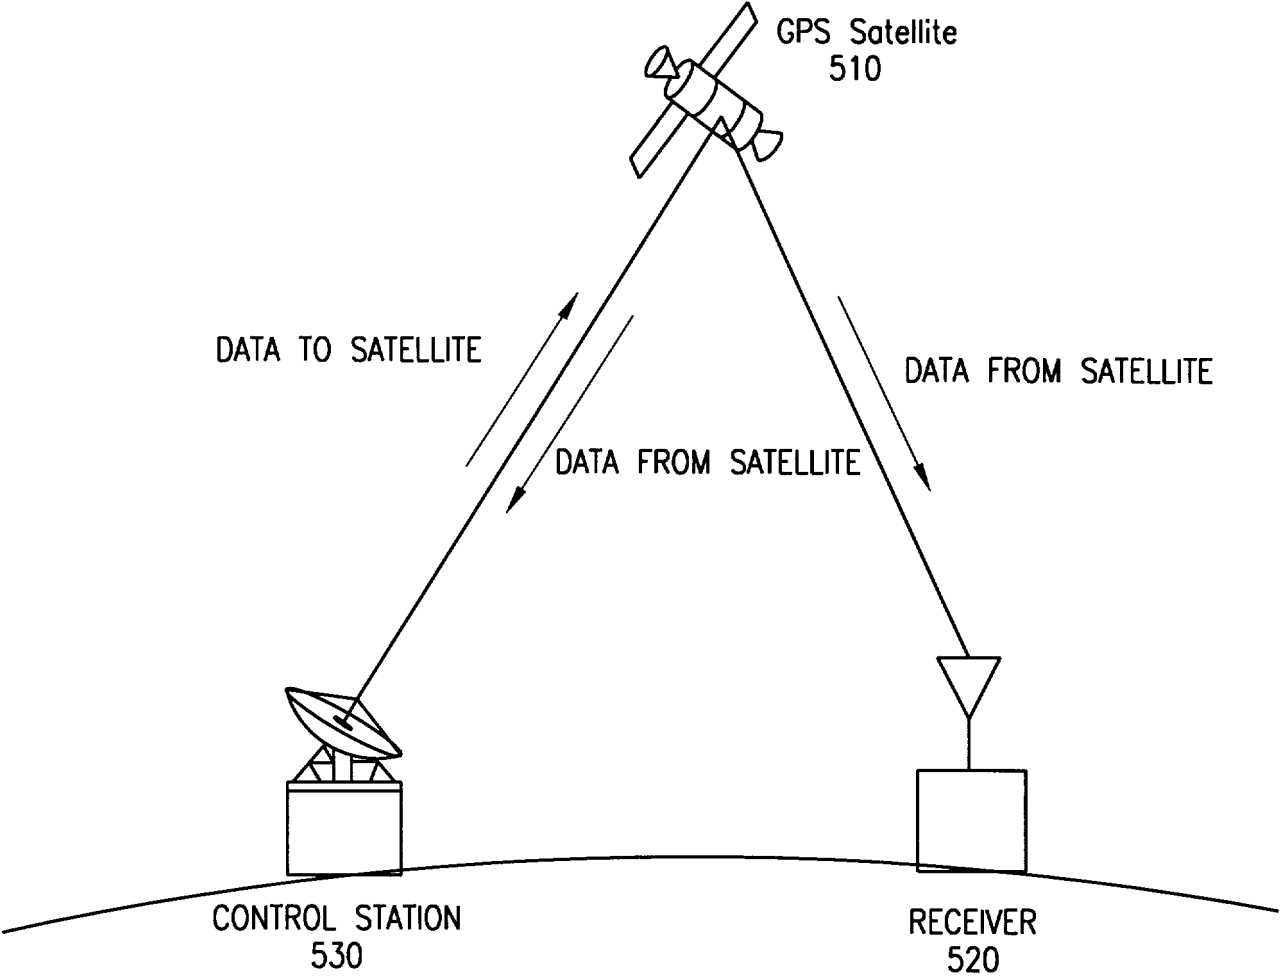


FIG. 5

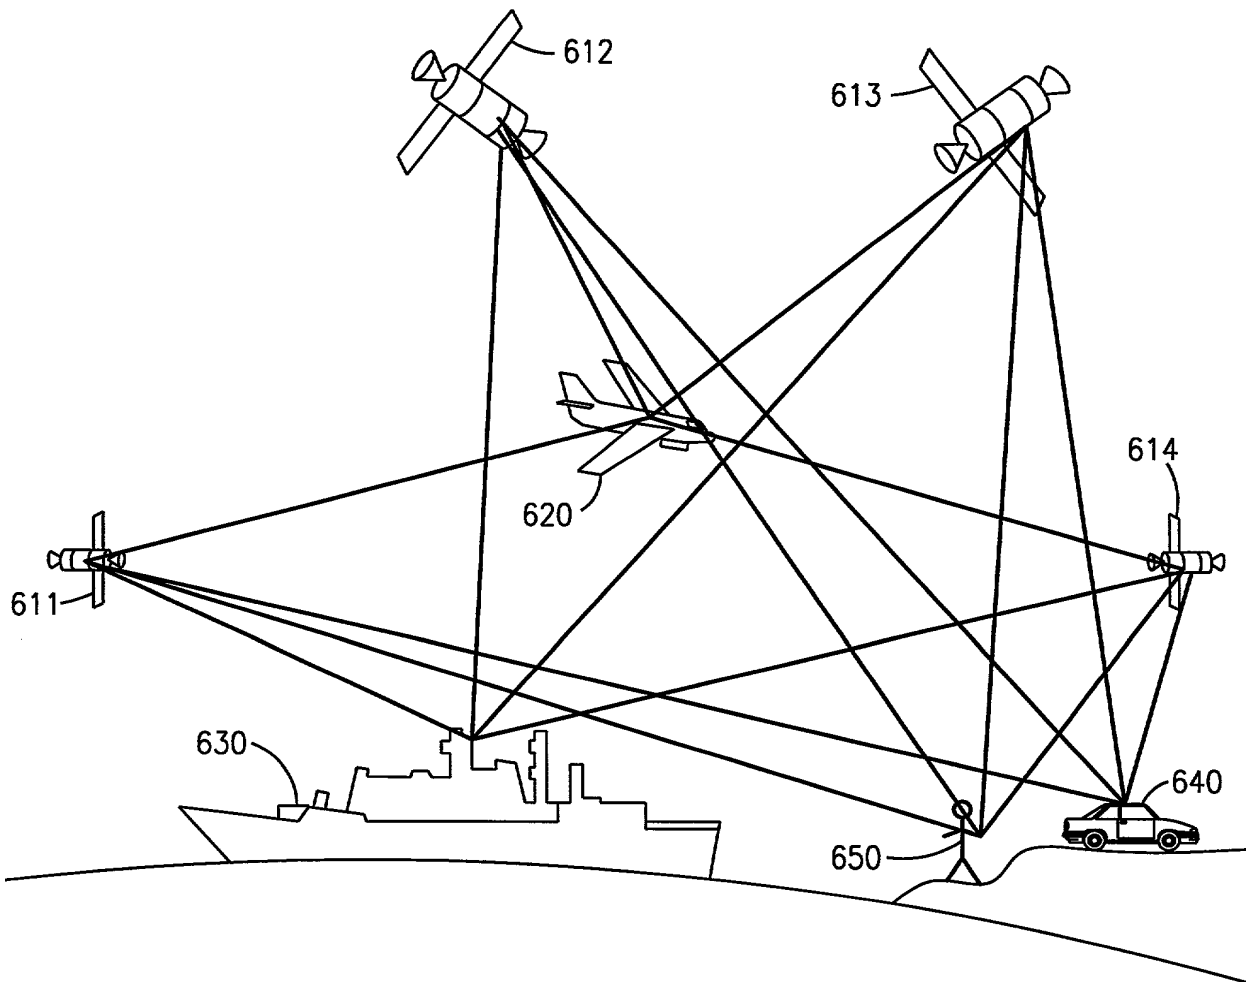


FIG. 6

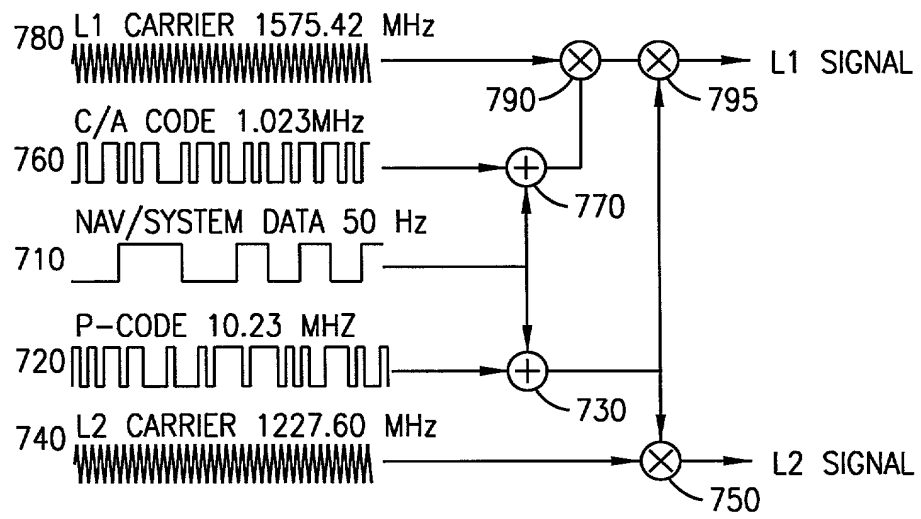


FIG. 7

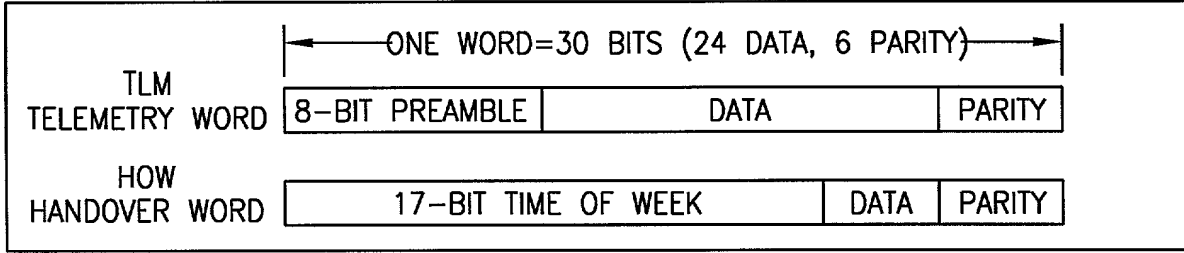
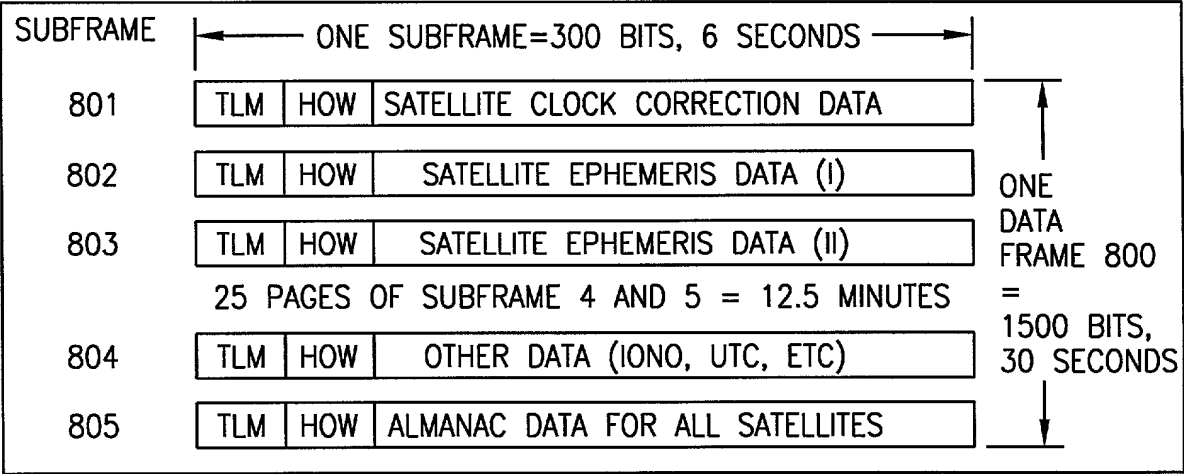


FIG. 8

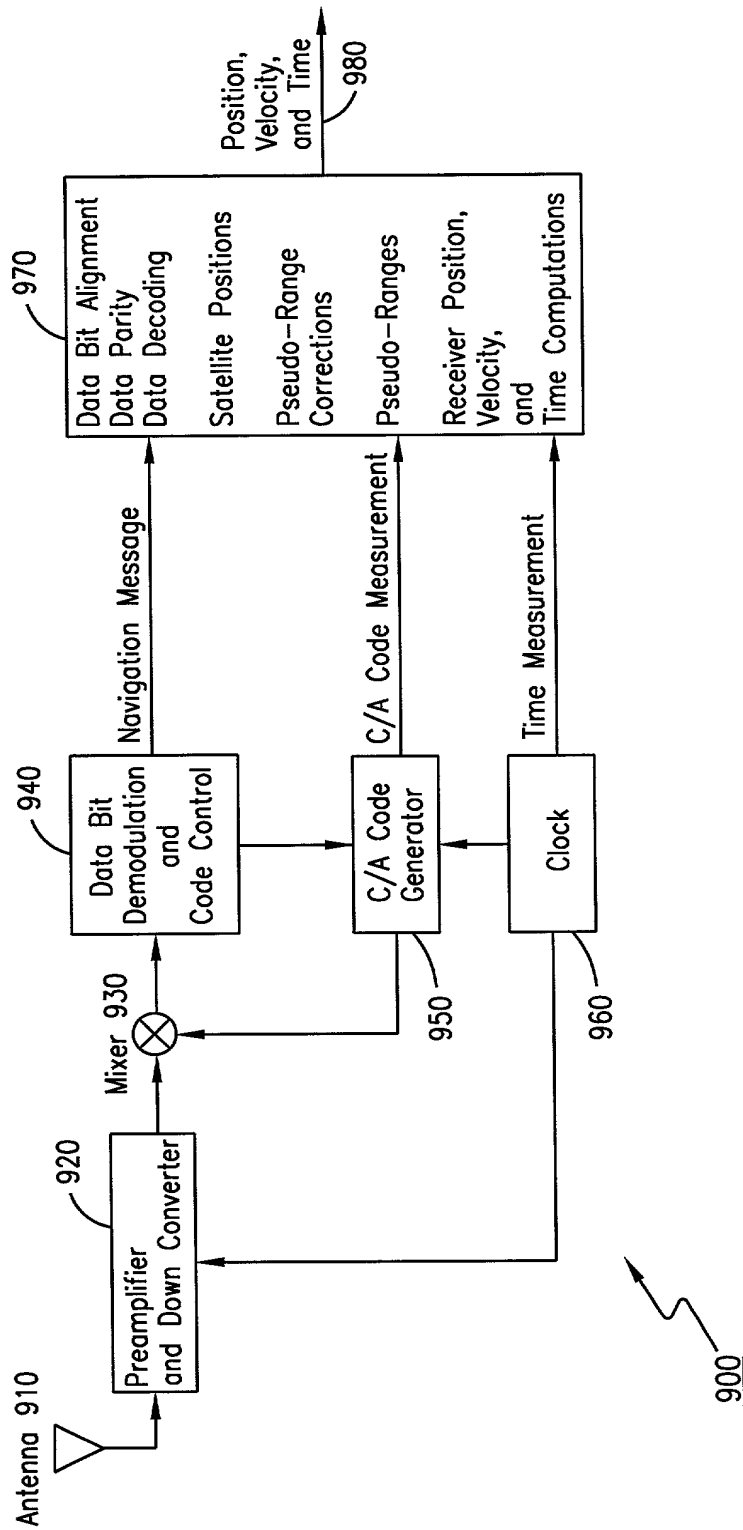


FIG. 9

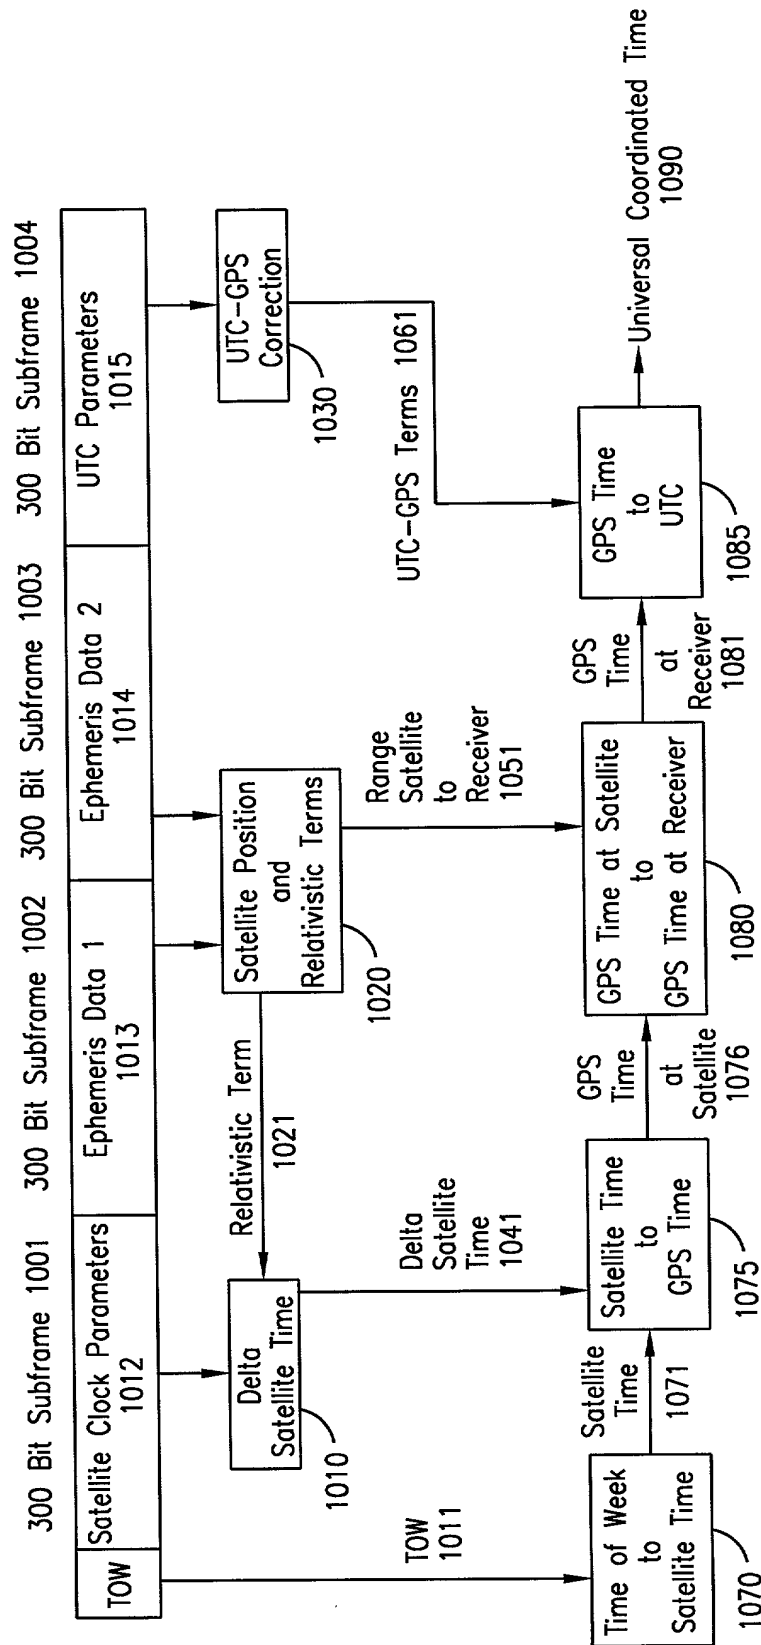


FIG. 10

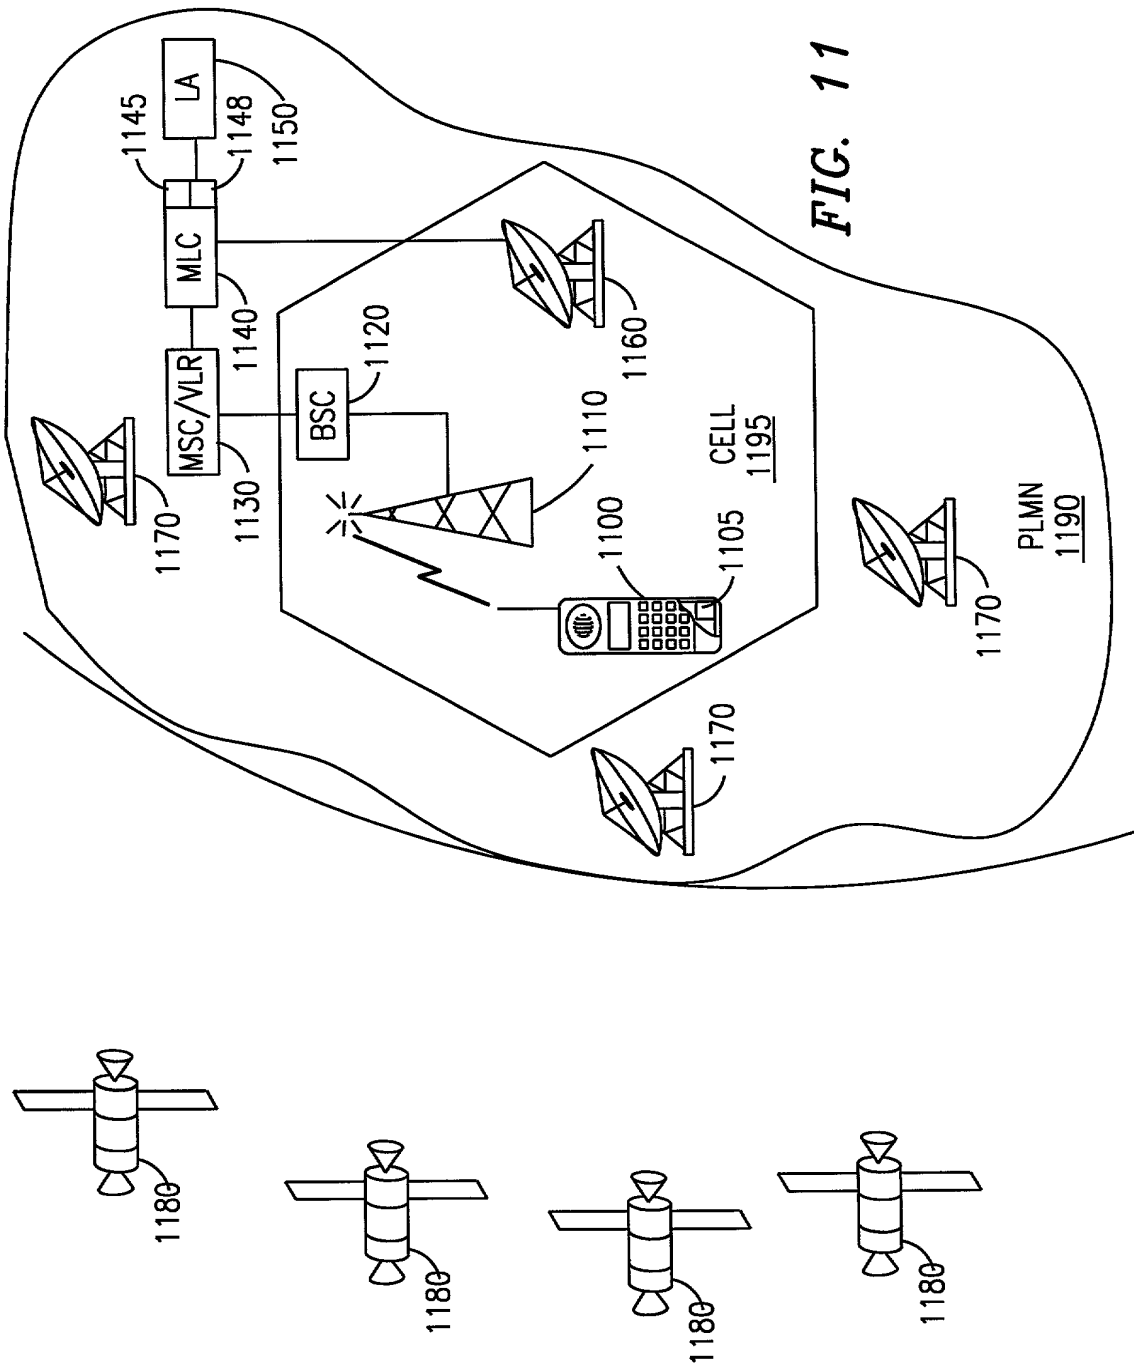


FIG. 11

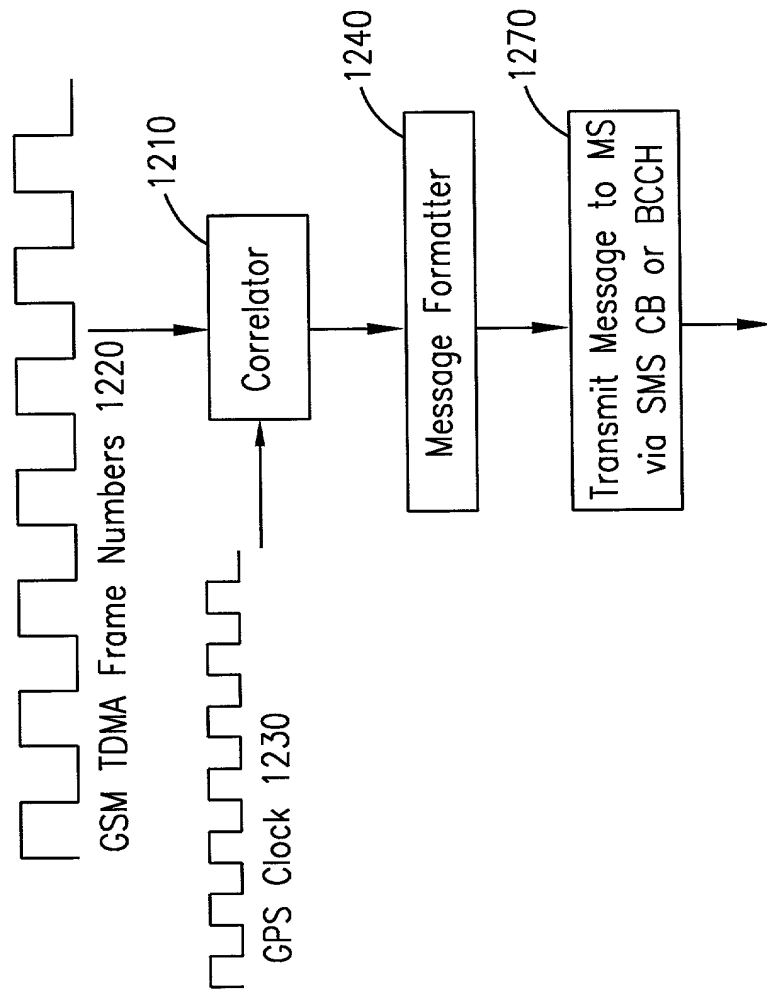


FIG. 12

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: SYSTEM AND METHOD FOR FAST COLD START OF A GPS RECEIVER IN A TELECOMMUNICATIONS ENVIRONMENT, the specification of which:

___ is attached hereto.

___ was filed on ___, under Attorney Docket No. ___ and assigned Application Serial No. ___ and was amended on ___ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of any application on which priority is claimed:

Country	Number	Date Filed	Priority Claimed
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending)
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Donald D. Mondul, Reg. No. 29,957; Charles L. Moore, Jr., Reg. No. 33,742; David G. Matthews, Reg. No. 33,959; David C. Hall, Reg. No. 38,904; David K. Purks, Reg. No. 40,133; Debra K. Stephens, Reg. No. 38,211 and James S. Finn, Reg. No. 38,450 of **ERICSSON INC.**, 1 Triangle Drive, Research Triangle Park, N.C. 27709, and THOMAS E. ANDERSON, Reg. No. 37,063; JEFFERY E. BACON, Reg. No. 35,055; THOMAS L. CANTRELL, Reg. No. 20,849; THOMAS L. CRISMAN, Reg. No. 24,846; SHREEN K. DANAMRAJ, Reg. P-41,696; STUART D. DWORK, Reg. No. 31,103; H. MATHEWS GARLAND, Reg. No. 19,129; J. KEVIN GRAY, Reg. No. 37,141; STEVEN R. GREENFIELD, Reg. No. 38,166; KEVIN R. HANSBRO, Reg. No. 38,485; J. PAT HEPTIG, Reg. No. 40,643; CRAIG A. HOERSTEN, Reg. No. 38,917; JOHN R. KIRK, JR., Reg. No. 24,477; PETER J. MANSO, Reg. No. 32,264; ROGER L. MAXWELL, Reg. No. 31,855; ROBERT A. McFALL, Reg. No. 28,968; LISA H. MEYERHOFF, Reg. No. 36,869; MICHELE MOBLEY, Reg. No. 35,616; STANLEY R. MOORE, Reg. No. 26,958; RICHARD J. MOURA, Reg. No. 34,883; MARK V. MULLER, Reg. No. 37,509; P. WESTON MUSSELMAN, JR., Reg. No. 31,644; RICHARD L. MYSLIWIEC, Reg. No. 40,098; RUSSELL N. RIPPAMONTI, Reg. No. 39,521; HOLLY I. RUDNICK, Reg. P-43,065; KEITH W. SAUNDERS, Reg. No. 41,462; ROBERT L. SCOTT, JR., Reg. No. P-43,102; JERRY R. SELINGER, Reg. No. 26,582; SCOTT B. STAHL, Reg. No. 33,795; RICHARD J. STOKEY, Reg. No. 40,383; ANDRE M. SZUWALSKI, Reg. No. 35,701; ALAN R. THIELE, Reg. No. 30,694; WILLIAM J. TUCKER, Reg. No. 41,356; CHARLES PATRICK TURLEY, Reg. No. 35,723; TAMSEN VALOIR, Reg. No. 41,417; RAYMOND VAN DYKE, Reg. No. 34,746; BRIAN D. WALKER, Reg. No. 37,751, GERALD T. WELCH, Reg. No. 30,332; and STEPHEN J. WYSE, Reg. No. 40,880 and of the firm of

JENKENS & GILCHRIST, 3200 Fountain Place, 1445 Ross Avenue, Dallas, Texas 75202-2799; and

Address all telephone calls and correspondence to:

Raymond Van Dyke
Jenkins & Gilchrist, P.C.
3200 Fountain Place
1445 Ross Avenue
Dallas, Texas 75202-2799
214/855-4708

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1	JAN LENNART KRANSO		
	First Name	Inventor's Signature	Date
	2504 Deer Horn Drive Plano, Texas 75025		SWEDISH
	Residence		Citizenship
	2504 Deer Horn Drive Plano, Texas 75025		
	Post Office Address		

1	CHRISTOPHER HIGH KINGDON	Inventor's Signature	Date
	First Name		
	3038 Kingswood Drive Garland, Texas 75040 Residence		
2	3038 Kingswood Drive Garland, Texas 75040 Post Office Address	Inventor's Signature	Date
	LELAND SCOTT BLOEBAUM		
	103 Battery Point Place Cary, NC 27513 Residence		
3	103 Battery Point Place Cary, NC 27513 Post Office Address	Inventor's Signature	Date
	Full Name		
	Residence		
4	Post Office Address	Inventor's Signature	Date
	First Name		
	Residence		
4	Post Office Address	Inventor's Signature	Date
	First Name		
	Residence		

2025-06-16 14:25:00

5	First Name	Inventor's Signature	Date
	Residence		Citizenship
	Post Office Address		
6	Full Name	Inventor's Signature	Date
	Residence		Citizenship
	Post Office Address		
7	Full Name	Inventor's Signature	Date
	Residence		Citizenship
	Post Office Address		